



**DORNER**<sup>®</sup>  
AquaPruf






**NEW** **Stainless Steel Gravity Roller**  
HOLLOW TUBE ROLLERS

**General Specifications:**

- Roller widths: 8", 12", 18", 24", 30", & 36"
- Conveyor lengths: 36" to 120" in 3" increments
- Load capacity: 20 lbs. per roller
- Frame is all welded with round cross members
- Frames outer surface is a #4 finish with 2B on internal components
- Roller centers 3" and 6"
- Standard roller 1.9" diameter
- Rollers are 304 SS hollow tubes with a 2B finish
- Stainless steel precision bearings are located in plastic housing
- Roller ends spring loaded 7/16" hex shaft
- Stands are stainless steel tube with adjustable foot

**Features & Benefits**

- Frame is constructed of continuous TIG welded 304 stainless steel for durability in tough applications
- Integral 1" high side for product containment or low side for maximum flexibility
- Spring loaded roller removed quickly for access to frame during cleaning
- Optional welded end stop available for durability

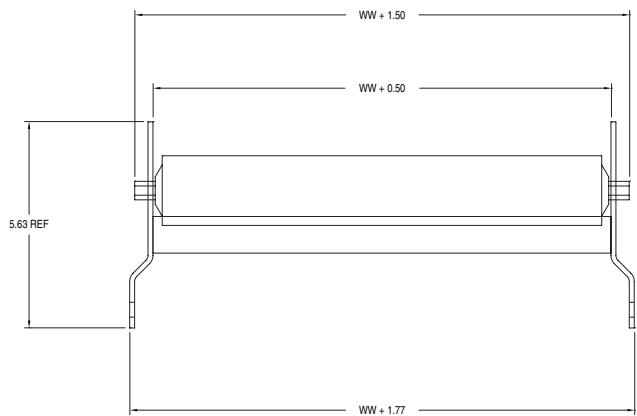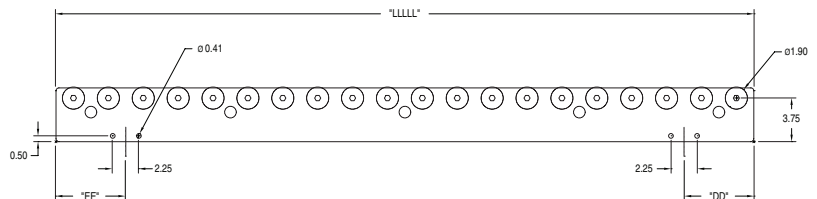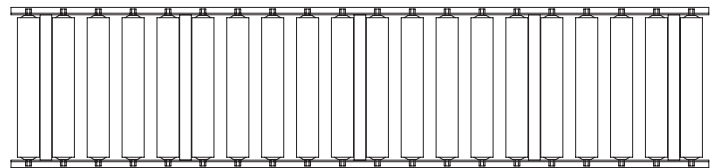

\* Recommended minimum angle of decline is 5 degrees for products greater than 10 lbs.  
 \* Recommended minimum angle of decline is 7-10 degrees for products less than 5 lbs.  
 \* Recommended 3 rollers are in contact with the product.

**DORNER**<sup>®</sup>

DORNER MFG. CORP.  
PO Box 20 • 975 Cottonwood Ave.  
Hartland, WI 53029 USA


INSIDE THE USA  
TEL: 800.397.8664  
FAX: 800.369.2440

OUTSIDE THE USA  
TEL: 262.367.7600  
FAX: 262.367.5827

[www.dorner.com](http://www.dorner.com)  
[info@dorner.com](mailto:info@dorner.com)





**DORNER**<sup>®</sup>  
AquaPruf

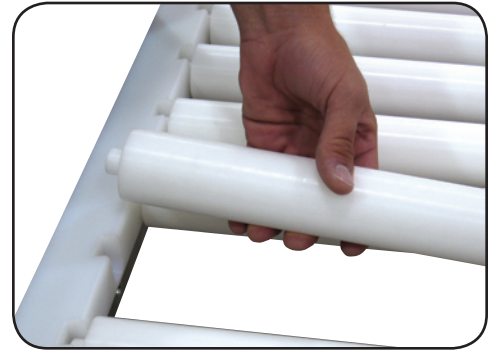

**NEW** **Stainless Steel Gravity Roller**  
SOLID ACETAL ROLLERS


**General Specifications:**

- Roller widths: 8", 12", 18", 24", 30", & 36"
- Conveyor lengths: 36" to 120" in 3" increments
- Load capacity: 20 lbs. per roller
- Frame is all welded with solid round cross members
- All frame components are a #4 finish
- Frame features welded standoffs for supports
- Roller centers 3" and 6"
- 2" diameter rollers are solid Acetal
- Roller ends are located in a UHMW guide bar
- Stands are stainless steel tube with adjustable foot and thread guards
- Gravity roller is designed to USDA Red Meat & Poultry standards

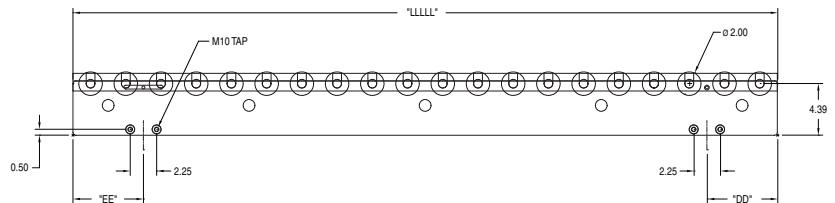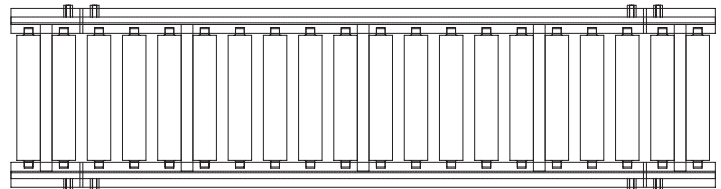

**Features & Benefits**

- Frame is constructed of continuous TIG welded 304 stainless steel for durability in tough applications
- 1" high side for product containment or low side for maximum flexibility
- Solid rollers simply lift out of UHMW guide for quick for access to frame during cleaning
- Solid UHMW guides removable without tools for complete access to frame during cleaning
- Optional welded end stop available for durability

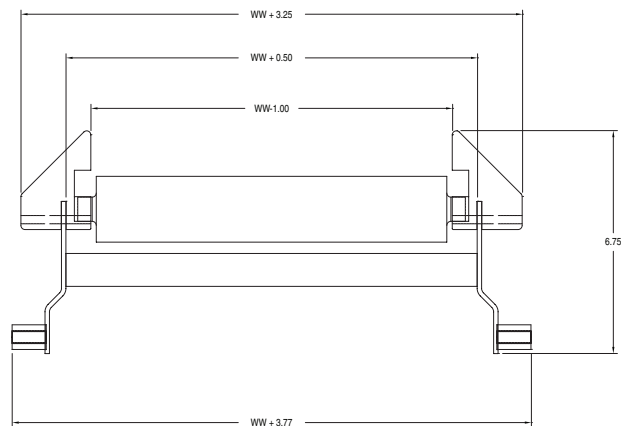

\* Recommended minimum angle of decline is 5 degrees for products greater than 10 lbs.  
 \* Recommended minimum angle of decline is 10 degrees for products less than 5 lbs.  
 \* Recommended 3 rollers are in contact with the product.

**DORNER**<sup>®</sup>

DORNER MFG. CORP.  
PO Box 20 • 975 Cottonwood Ave.  
Hartland, WI 53029 USA

INSIDE THE USA  
TEL: 800.397.8664  
FAX: 800.369.2440

OUTSIDE THE USA  
TEL: 262.367.7600  
FAX: 262.367.5827

[www.dorner.com](http://www.dorner.com)  
[info@dorner.com](mailto:info@dorner.com)