


# Synchronous Linear Motors

## L3S Series

(All Sizes)

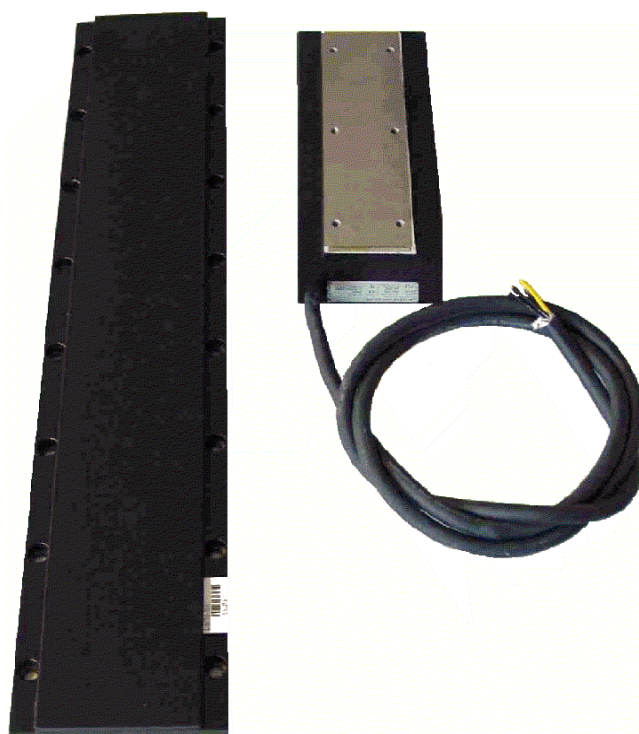

**Flat linear motors for highly-dynamic linear movement**


<b>Thrust Forces</b>	<b>30 to 16000 N</b>
<b>Speed range</b>	<b>from 0 up to 20 m/s</b>
<b>Convection Cooling</b>	<b>IC40</b>
<b>Temperature Class</b>	<b>F</b>
<b>Protection Class</b>	<b>IP55</b>

Only one of many possible winding variations per motor size is calculated and specified here. These windings might not be best suited for a certain application. In any case, peak- and continuous forces given here are typical for a certain motor size. Select a motor size from force data and mechanical dimensions. We assist finding the right winding your application specific speeds.

Issued Mai 2008

# BAUTZ

# Series L3S

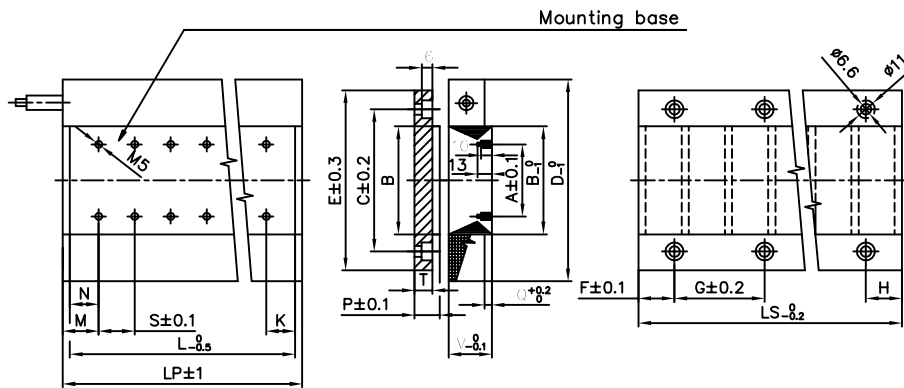

## Primary parts

Type	F <sub>peak</sub> [N]	A [mm]	B [mm]	D [mm]	L [mm]	L <sub>p</sub> [mm]	K [mm]	M [mm]	N [mm]	Q [mm]	S [mm]	V [mm]	δ <sub>p</sub> /δ <sub>s</sub>	U [mm]	Y [mm]	m [kg]
L3S030P-1215	400	1x16	30	64	184,2	192	17,1	21	17,1	6	75	43,9	0,5/1,0	9	29	2,5
L3S030P-2415	800				360	368	30	34	30							4,8
L3S030P-3615	1200				535,8	544	42,9	47	42,9							7,3
L3S050P-1215	650	1x36	50	84	184,2	192	17,1	21	17,1	6	75	43,9	0,5/1,0	9	29	3,6
L3S050P-2415	1300				360	368	30	34	30							6,9
L3S050P-3615	1950				535,8	544	42,9	47	42,9							10,4
L3S050P-4815	2600				711,6	720	18,3	22,5	18,3							13,9
L3S075P-1215	1000	2x32	75	109	184,2	192	17,1	21	17,1	6	75	43,9	0,5/1,0	9	29	5
L3S075P-2415	2000				360	368	30	34	30							9,6
L3S075P-3615	3000				535,8	544	42,9	47	42,9							14,4
L3S075P-4815	4000				711,6	720	18,3	22,5	18,3							19,2
L3S075P-6015	4900				887,4	896	31,2	35,5	31,2							23,9
L3S100P-1215	1325	2x36	100	134	184,2	192	17,1	21	17,1	6	75	43,9	0,5/1,0	9	29	6,5
L3S100P-2415	2650				360	368	30	34	30							12,5
L3S100P-3615	3970				535,8	544	42,9	47	42,9							18,9
L3S100P-4815	5300				711,6	720	18,3	22,5	18,3							25
L3S100P-6015	6600				887,4	896	31,2	35,5	31,2							31,2
L3S150P-1215	2000	4x32	150	184	184,2	192	17,1	21	17,1	8	75	45,9	0,5/1,0	10	31	9,5
L3S150P-2415	3900				360	368	30	34	30							18
L3S150P-3615	5800				535,8	544	42,9	47	42,9							27
L3S150P-4815	7700				711,6	720	18,3	22,5	18,3							36
L3S150P-6015	9600				887,4	896	31,2	35,5	31,2							45
L3S200P-1215	2700	5x36	200	234	184,2	192	17,1	21	17,1	8	75	45,9	0,5/1,0	10	31	12
L3S200P-2415	5250				360	368	30	34	30							23,5
L3S200P-3615	7800				535,8	544	42,9	47	42,9							35
L3S200P-4815	10350				711,6	720	18,3	22,5	18,3							47
L3S200P-6015	12900				887,4	896	31,2	35,5	31,2							58
L3S250P-1215	3170	6x38	250	284	184,2	192	17,1	21	17,1	8	75	45,9	0,5/1,0	10	31	15
L3S250P-2415	6300				360	368	30	34	30							29
L3S250P-3615	9450				535,8	544	42,9	47	42,9							43
L3S250P-4815	12600				711,6	720	18,3	22,5	18,3							58
L3S250P-6015	15750				887,4	896	31,2	35,5	31,2							72

## Secondary parts

Type	B [mm]	C [mm]	E [mm]	F [mm]	G [mm]	H [mm]	Ls [mm]	P [mm]	T [mm]	2p	m [kg]
L3S030S-0416	30	45	60	32	-	32	64	14	8,5	4	0,34
L3S030S-0816						64	128			8	0,68
L3S030S-1616						3x64	256			16	1,36
L3S030S-3216						7x64	512			32	2,72
L3S030S-6416						15x64	1024			64	5,43

Type	B [mm]	C [mm]	E [mm]	F [mm]	G [mm]	H [mm]	Ls [mm]	P [mm]	T [mm]	2p	m [kg]
L3S050S-0416	50	65	80	32	-	32	64	14	8,5	4	0,47
L3S050S-0816					64		128			8	0,95
L3S050S-1616					3x64		256			16	1,89
L3S050S-3216					7x64		512			32	3,8
L3S050S-6416					15x64		1024			64	7,58
L3S075S-0416	75	90	105	32	-	32	64	14	8,5	4	0,64
L3S075S-0816					64		128			8	1,28
L3S075S-1616					3x64		256			16	2,56
L3S075S-3216					7x64		512			32	5,12
L3S075S-6416					15x64		1024			64	10,24
L3S100S-0416	100	115	130	32	-	32	64	14	8,5	4	0,8
L3S100S-0816					64		128			8	1,6
L3S100S-1616					3x64		256			16	3,2
L3S100S-3216					7x64		512			32	6,4
L3S100S-6416					15x64		1024			64	12,8
L3S150S-0416	150	165	180	32	-	32	64	14	8,5	4	1,31
L3S150S-0816					64		128			8	2,62
L3S150S-1616					3x64		256			16	5,25
L3S150S-3216					7x64		512			32	10,5
L3S150S-6416					15x64		1024			64	21
L3S200S-0416	200	215	230	32	-	32	64	14	8,5	4	1,7
L3S200S-0816					64		128			8	3,4
L3S200S-1616					3x64		256			16	6,81
L3S200S-3216					7x64		512			32	13,62
L3S200S-6416					15x64		1024			64	27,24
L3S250S-0416	250	270	285	32	-	32	64	14	8,5	4	2,11
L3S250S-0816					64		128			8	4,22
L3S250S-1616					3x64		256			16	8,45
L3S250S-3216					7x64		512			32	16,9

### Standard cables

Cable	30°C*	40°C*	60°C*
4 x 0,75 + 1x (2 x 0,25)	12 A	10,4 A	7,8 A
4 x 1,5 + 1x (2 x 0,5)	18 A	15,5 A	11,7 A
4 x 2,5 + 1x (2 x 0,5)	26 A	24 A	16,8 A
4 x 4 + 1x (2 x 0,5)	42 A	38,5 A	27,5 A


\*) – Ambient temperature

### Circuit

Converter	Cable
U	1
V	2
W	3
PE	YG*
TS	White
T	Brown

TS – Thermoswitch

YG\* – Yellow-green

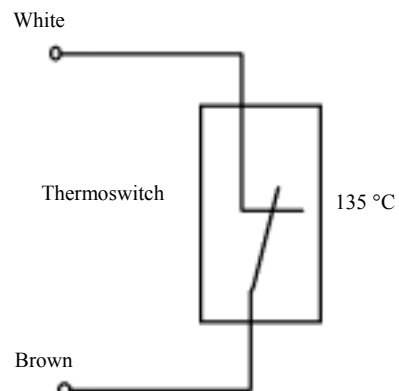

### Thermoswitch


Design	Breaker contact		
	Nominal voltage	250 V <sub>AC</sub>	500 V <sub>AC</sub>
Nominal current			
	cos φ = 1,0	2,5 A	0,75 A
	cos φ = 0,6	1,6 A	0,5 A
Max.switching current	7,5 A	2,5 A	

**Technical data**  
**L3S030P – 250P , U<sub>DC</sub> = 560**

Type	F <sub>peak</sub> [N]	I <sub>peak</sub> [A]	F <sub>1</sub> [N]	I <sub>1</sub> [A]	v <sub>1</sub> [ms <sup>-1</sup> ]	f <sub>1</sub> [Hz]	ΔP <sub>1</sub> [W]	F <sub>nc</sub> [N]	I <sub>nc</sub> [A]	v <sub>nc</sub> [ms <sup>-1</sup> ]	ΔP <sub>nc</sub> [W]	F <sub>A</sub> [N]	I <sub>ULT</sub> [A]	k <sub>F</sub> [NA <sup>-1</sup> ]	R <sub>U-V</sub> [W]	L <sub>U-V</sub> [mH]	t <sub>el</sub> [ms]
L3S030P-1215-HH	400	8	300	5,6	8,5	265	290	150	2,50	9,5	65	900	11	60	5,48	34	7
L3S030P-2415-HH	800	16	600	11,1	8,5	265	585	300	5,10	9,5	130	1750	23	60	2,74	17	7
L3S030P-3615-HH	1200	25	900	16,6	8,5	265	875	450	7,70	9,5	195	2580	34	60	1,83	11	7
L3S050P-1215-JH	650	8	500	5,6	5,1	159	396	280	2,80	5,6	110	1480	11	100	7,4	55	8,5
L3S050P-2415-JH	1300	16	1000	11,1	5,1	159	792	560	5,70	5,6	220	2880	23	100	3,7	27	8,5
L3S050P-3615-JH	1950	25	1500	16,6	5,1	159	1190	840	8,60	5,6	330	4300	34	100	2,47	18	8,5
L3S050P-4815-JH	2600	32	2000	22,2	5,1	159	1585	1120	11,50	5,6	440	5700	44	100	1,85	14	8,5
L3S075P-1215-NH	1000	8	750	5,6	3,4	106	635	440	3,00	3,7	160	2200	11	150	9,81	79	9,2
L3S075P-2415-NH	2000	16	1500	11,1	3,4	106	1065	880	6,00	3,7	320	4320	23	150	4,9	39	9,2
L3S075P-3615-NH	3000	25	2250	16,6	3,4	106	1575	1320	9,00	3,7	480	6430	34	150	3,27	26	9,2
L3S075P-4815-NH	4000	32	3000	22,2	3,4	106	2100	1760	12,00	3,7	640	8540	44	150	2,45	20	9,2
L3S075P-6015-NH	5000	41	3750	27,8	3,4	106	2685	2200	15,00	3,7	800	10650	57	150	1,96	16	9,2
L3S100P-1215-PH	1325	8	1000	5,6	2,5	78	655	600	3,00	2,7	220	2950	11	200	12,2	105	9,8
L3S100P-2415-PH	2650	16	2000	11,1	2,5	78	1310	1200	6,10	2,7	430	5760	23	200	6,11	52	9,8
L3S100P-3615-PH	3970	25	3000	16,6	2,5	78	1970	1800	9,20	2,7	640	8570	34	200	4,07	35	9,8
L3S100P-4815-PH	5300	32	4000	22,2	2,5	78	2630	2400	12,30	2,7	850	11380	44	200	3,05	26	9,8
L3S100P-6015-PH	6600	41	5000	27,8	2,5	78	3280	3000	15,40	2,7	1100	14200	57	200	2,44	21	9,8
L3S150P-1215-SH	2000	8	1500	5,2	1,6	50	935	900	2,9	1,76	300	4420	11	300	18,2	180	9,9
L3S150P-2415-SH	3900	15	3000	10,4	1,6	50	1845	1800	5,8	1,76	600	8640	20	300	9,13	90	9,9
L3S150P-3615-SH	5800	22	4500	15,6	1,6	50	2780	2700	8,7	1,76	900	12860	30	300	6,08	60	9,9
L3S150P-4815-SH	7700	30	6000	20,7	1,6	50	3685	3600	11,5	1,76	1200	17000	40	300	4,56	45	9,9
L3S150P-6015-SH	9600	37	7500	26,0	1,6	50	4550	4500	14,4	1,76	1500	21300	50	300	3,65	36	9,9
L3S200P-1215-QH	2700	8	2000	5,2	1,2	37,5	1185	1260	3,0	1,31	425	5900	11	400	23,4	240	10,5
L3S200P-2415-QH	5250	15	4000	10,4	1,2	37,5	2370	2520	6,0	1,31	840	11520	20	400	11,70	120	10,5
L3S200P-3615-QH	7800	23	6000	15,5	1,2	37,5	3550	3780	9,1	1,31	1265	17150	30	400	7,80	80	10,5
L3S200P-4815-QH	10350	30	8000	20,7	1,2	37,5	4730	5040	12,1	1,31	1680	22770	40	400	5,85	60	10,5
L3S200P-6015-QH	12900	37	10000	25,9	1,2	37,5	5920	6300	15,1	1,31	2125	28400	50	400	4,68	48	10,5
L3S250P-1215-TH	3170	7	2400	5	1	31,3	1460	1500	2,9	1,09	500	7370	11	500	28,6	300	12
L3S250P-2415-TH	6300	15	4800	9,9	1	31,3	2915	3000	5,7	1,09	1000	14400	20	500	14,3	150	12
L3S250P-3615-TH	9450	21,7	7200	14,9	1	31,3	4370	4500	8,6	1,09	1500	21430	30	500	9,52	100	12
L3S250P-4815-TH	12600	29	9600	19,9	1	31,3	5830	6000	11,5	1,09	2000	28450	40	500	7,14	75	12
L3S250P-6015-TH	15750	36,2	12000	24,8	1	31,3	7280	7500	14,4	1,09	2500	35500	50	500	5,71	60	12

L3S-4

## Load characteristic of the type L3S

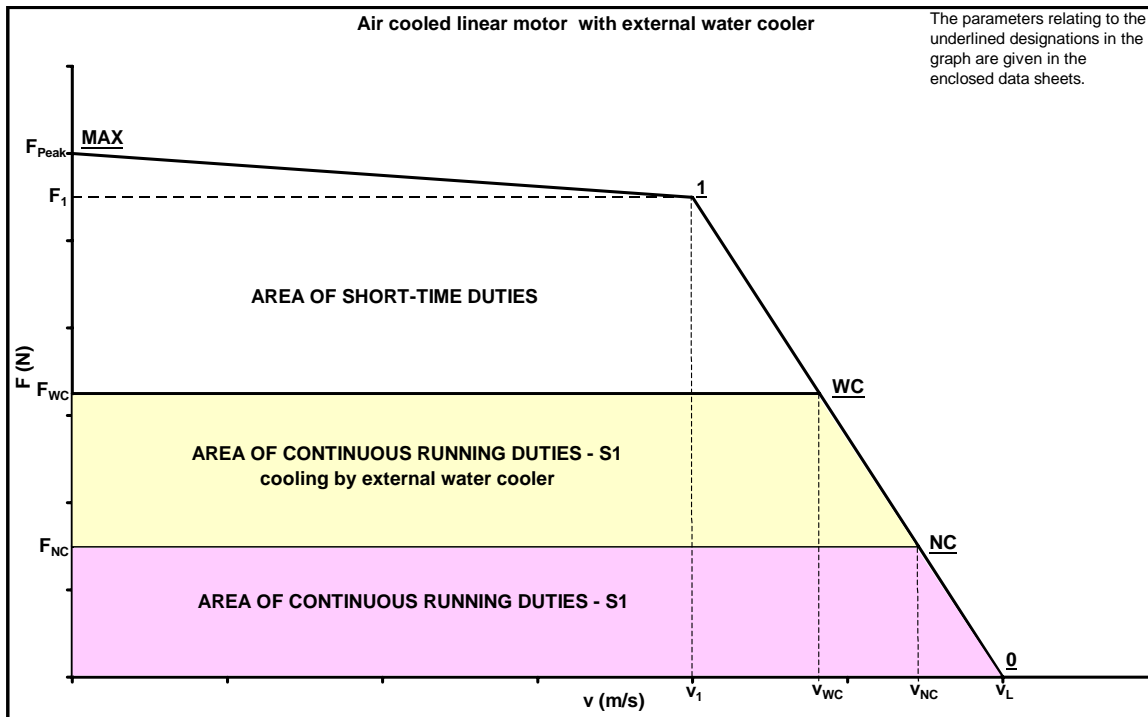

### List of symbols

$F_{\text{Peak}}$ [ N ]	- highest force developed by the motor (it is used as starting force)	$R_{u-v}$ [ $\Omega$ ]	- resistance of the motor winding at 20°C
$F_1$ [ N ]	- max. force by current $I_1$ and speed $v_1$	$L_{u-v}$ [ mH ]	- inductance of the winding
$v_1$ [ m/s ]	- speed of the motor by current $I_1$ and force $F_1$ . $F_1$ , $I_1$ and $v_1$ values determine the transition point of the motor.	$\tau_{el}$ [ ms ]	- electromagnetic time constant of the motor
$F_{NC}$ [ N ]	- force being developed by the motor continuously at the air cooling by the motor surface and additional cooling area represented by an aluminium plate with the thickness of 10 mm and the cooling surface area three times as large as mechanical interface of the primary part. This additional cooling plate serves for simulating heat removal into the structure of the driven equipment during the tests	$U_{BUS}$ [ V ]	- DC voltage of intermediate circuit of the frequency inverter for which the motor is intended
$F_A$ [ N ]	- attractive force between the primary and secondary parts of the motor	$k_F$ [ N/A ]	- force constant
$F_{wc}$ [ N ]	- force being developed by the motor continuously at the cooling by the additional water cooler	$k_E$ [ Vs/m ]	- voltage constant
$I_{\text{peak}}$ [ A ]	- current corresponding to the force $F_{\text{peak}}$	$k_M$ [ N/ $\sqrt{W}$ ]	- motor constant
$I_1$ [ A ]	- maximum short-time permissible current (r.m.s. value) corresponding to the force $F_1$	$v_L$ [ m/s ]	- theoretical no-load velocity
$I_{wc}$ [ A ]	- current corresponding to the force $F_{wc}$	$\Delta P_1$ [ W ]	- motor losses corresponding to the force $F_1$ at the winding temperature of 130°C
$I_{NC}$ [ A ]	- current corresponding to the force $F_{NC}$	$\Delta P_{wc}$ [ W ]	- motor losses corresponding to the force $F_{wc}$ at the winding temperature of 130°C
		$\Delta P_{NC}$ [ W ]	- motor losses corresponding to the force $F_{NC}$ at the winding temperature of 130°C
		$m$ [ kg ]	- mass of the primary part of the motor
		$m_{\text{sec}}$ [ kg ]	- mass of the secondary part of the motor
		$f_1$ [ Hz ]	- supply current frequency corresponding to the velocity $v_1$
		$I_{\text{ult}}$ [ A ]	- ultimate current, exceeding of which may cause magnet demagnetization

## Order Code for Linear Motors

L 3 S    050 P - 24 15 - F L - X 0 - 000

**Linear**

**Number of the series**

( 1 , 2 , 3 , 4 )

**Type of the motor**

Synchronous	S
Induction	A
Reluctance	R

**Integrated cooler**

**Active width**

**Part of the motor**

Primary	P
Secondary	S
Additional cooler	K

**Number of slots in primary part**

**Number of poles in secondary part**

**Slot pitch of primary part**



**Pole pitch of secondary part**

**Serial number of the variant**

**Version**

0	- Standard
1	- Dimensional deviations
2	- Electrical deviations
3	- Dimensional and electrical deviations

**Electrical supply**



0	- For secondary part and cooler
S	- Connector

**Type of the winding**

N	- Winding for $U_{DC}=140 V_{DC}$
L	- Winding for $U_{DC}=330 V_{DC}$
H	- Winding for $U_{DC}=560 V_{DC}$
0	- For secondary part and cooler

**Force constant**

B - 9	H - 60	O - 180	0 - For secondary part and cooler
C - 15	K - 70	P - 200	
D - 25	I - 90	R - 250	
E - 30	J - 100	S - 300	
F - 45	L - 120	U - 350	
G - 50	N - 150	Q - 400	

# General technical and operating conditions of the motors

## Cooling of linear motors

Primary parts:

- series L3S : IC40 i.e. natural cooling by means of motor surface
- series L3S + cooler : IC3W7 i.e. water cooling by means of additional cooler
- Secondary parts: are not cooled

## Operating conditions

Linear motors are designed for being used in the environment protected against weather influences defined in the EN 60721-3-3 standard:

- ambient temperature +5 °C to +25 °C;
- relative air humidity 5 % to 95 %;
- altitude above sea level up to 1000 m;
- For water cooling, it is necessary to use treated water without mechanical impurities. The recommended water hardness is max. 0,7 mmol/l. If necessary, water softeners are to be used. The recommended cooling water acidity is 6,5 pH to 7,5 pH. The inlet water temperature is +5 °C to +25 °C. The maximum quantity of cooling water is 5 l/min at the pressure drop of 2 hPa. The cooling system is tested at the maximum pressure of 1 MPa.

## Other technical data

- Degree of protection of the motor:  
A high degree of protection IP 55 against contact with live parts is reached by embedding the whole winding and the primary motor circuit into protective sealing compound. As the motors are usually delivered as built-in ones, protection against contact with moving parts cannot be ensured.
- Thermal insulation class "F" according to EN 60034; Part 1 standard, allows the maximum temperature rise of the winding up to 105 K.
- The winding of the standard motor design is three-phase one, either **Y** -connected, without neutral point led out, or **Δ** - connected.
- Thermal protection:  
The winding of the standard motor design is protected by a thermal sensor (break contact) being located in end windings and reacting at the temperature of 125 °C. On customer request also PTC or resistance thermometers can be used as thermal sensors.
- Connection of the motor to the frequency inverter:  
The winding outlet is made as a standard by flexible cable enabling also supply of the moving primary part. On request the motor winding can be led out to a connector determined by the customer.
- Surface protection:  
The standard machines are painted black. On request of the customer also a paint for food industry or another colour can be used.

## Safety rules

The secondary parts of synchronous linear motors are fitted with very strong permanent magnets ( $B_r \approx 1,2 \text{ T}$ ). The coercive force of the magnets is stable, independent of machine operating conditions and results in a continuous attractive force acting between the primary and secondary parts ( see the attractive force values in data sheets of the particular motors), as well as between the secondary part and any magnetic part in the close vicinity. If these parts are not fixed, they could get move suddenly, unexpectedly and very fast. Their movement ends by a very strong pressure on secondary part. As these forces are not detectable by human senses, they are often underestimated. Magnetic field also

influences sensitive electronic and magnetic devices as watches, mobile phones, floppy discs, magnetic cards, computers and disturbs the colour stability on displays. The influence of magnetic field on healthy human body is harmless. Magnetic field may also influence pacemakers, audio aids and other electronic orthopaedic aids, which may be very dangerous for persons wearing them.

Main precautions :

- Assembly and maintenance must be carried out by at least two trained operators.
- Assembly or maintenance must be always carried out in gloves.
- Warning plates

ATTENTION: STRONG MAGNETS IN LINEAR MOTORS OF THIS MACHINE !  
STRONG MAGNETIC FIELD !  
HIGH MAGNETIC ATTRACTIVE FORCES !

- must be located on visible places.
- Unfixed magnetic objects, as tools, jigs and parts ready for mounting must not be placed near secondary parts of the linear motor.
- Persons with pacemakers cannot be allowed to work close to the linear drives of this kind.
- For the case of an accident that could occur when working with linear motor at least two solid wedges made of non-magnetic material, and a hammer (approx. 1 kg) must be always at hand. These are the necessary tools for releasing fingers, hand or foot pushed between two magnetic parts.
- Special non-magnetic assembly facilities should be used, if necessary.

Rules for transport and storage:

- Products must be transported and stored in a special non-magnetic packing securing the safe distance (approx. 25 mm ) from secondary parts.
- In the course of transporting the machines or their parts with built-in primary and secondary parts their mutual moving must be prevented.
- Store rooms must be protected against weather influence, with the temperature in the range of  $-5 \div +35$  °C and at the humidity below 95 %. The rooms must be kept dry and clean.
- The stored magnetic parts must be designated with a warning plate

ATTENTION ! STRONG MAGNETS !

Notice: The original package secures the demanded safe distance from magnets and warning plates are attached to each part.

Assembly rules:

- The assembly must be always done by two workers at least.
- Any spontaneous movement of the secondary part or primary part of the linear motor along its assembled track must be prevented.
- Secondary parts should be mounted as the very last operation. The package should be removed just before the assembly.
- Before starting the assembly work on the equipment where the secondary parts have been already installed these parts must be provided with a fixed non-magnetic cover securing the safe distance approx. 25 mm from magnets.

## Sales and Service

### Germany

Danaher Motion GmbH  
Vertriebsbüro Nord  
Wacholderstr. 40-42  
40489 Düsseldorf  
Deutschland  
Tel: +49(0)203 9979 214  
Fax: +49(0)203 9979 3214  
E-Mail: iris.tolusch@danahermotion.com

Danaher Motion GmbH  
Vertriebsbüro Südwest  
Brückenfeldstraße 26/1  
75015 Bretten  
Germany  
Tel: +49(0)7252 9646210  
Fax: +49 (0) 7252 96462 69  
E-Mail: kerstin.mueller@danahermotion.com

Danaher Motion GmbH  
Vertriebsbüro Südost  
Kiesgräble 7  
89129 Langenau  
Deutschland  
Tel: +49(0)747162 23 23  
Fax: +49(0)747162 23 26  
E-Mail: ursula.koschak@danahermotion.com

### United Kingdom

Danaher Motion  
Chartmoor Road, Chartwell Business Park  
Leighton Buzzard, Bedfordshire  
LU7 4WG; United Kingdom  
Tel: +44(0)1525 243 243  
Fax: +44(0)1525 243 244  
E-mail: sales.uk@danahermotion.com

### France

Danaher Motion  
C.P 80018  
12, Rue Antoine Becquerel — Z.I. Sud  
72026 Le Mans Cedex 2  
Frankreich  
Tel: +33(0)243 50 03 30  
Fax: +33 (0) 243 50 03 39  
E-mail: sales.france@danahermotion.com

### Italy

Danaher Motion srl  
Largo Brughetti  
20030 Bovisio Masciago  
Italien  
Tel: +39 0362 594260  
Fax: +39 0362 594263  
E-mail: info@danahermotion.it

### Sweden

Danaher Motion Stockholm AB  
Solkraftsvägen 13  
135 70 Stockholm  
Schweden  
Tel: +46(0)8-682 64 00  
Fax: +46(0)8-682 65 80  
E-mail: sales.scandinavia@danahermotion.com

### Switzerland

Danaher Motion SA  
La Pierreire 2  
1029 Villars-Ste-Croix  
Schweiz  
Tel: +41 (0)2163133 33  
Fax: +41 (0) 21 636 05 09 E-  
mail: info@danaher-motion.ch

### USA, Canada and Mexiko

Danaher Motion  
203A West Rock Road  
Radford, VA 24141 USA  
Tel: 1-540-633-3400  
Fax: 1-540-639-4162  
E-mail: DMAC@danahermotion.com

### China

Danaher Motion  
Rm 2205, Scitech Tower  
22 Jianguomen Wai Street  
Beijing, China, 100004  
Tel: +86 10 6515 0260  
Fax: +86 10 6515 0263  
E-mail: chinainfo@danahermotion.com.cn

### Japan

Danaher Motion Japan  
2F, Tokyu Reit Hatchobori Bldg,  
2-7-1 Hatchobori Chuo-ku,  
Tokyo 104-0032 Japan  
Tel: +81-3-6222-1051  
Fax: +81-3-6222-1055  
E-mail: info@danahermotion.co.jp

### Asia Pazific

Danaher Motion (HK) Ltd  
UnitA, 16 Floor, 169 Electric Road  
Manulife Tower, North Point  
Hong Kong  
Tel: +852 2503 6581  
Fax: +852 25718585  
E-mail: victor.lim@danahermotion.com

0507