

# SPR 600 Series



***Electronic Pressure Regulator***  
*PNEUMATIC DIVISION*

**MATRIX**  
mechatronics

[www.matrix.to.it](http://www.matrix.to.it)  
[sales@matrix.to.it](mailto:sales@matrix.to.it)

The SPR 600 is an electronically-controlled pressure regulator equipped with an 8-bit microcontroller in combination with a 1" or 3/4" pilot-assisted pressure regulator (power stage). The control signal can be analogic, digital via RS232 or digital from the keyboard. It is converted into a proportional pressure signal by means of high-rate solenoid valves.

The advantages are:

- Integration with analogic or digital control systems (PC, PLC, etc.)
- Extremely fast response times
- Excellent repeatability and reliability
- Low power absorption

SPR 600 comes in two basic versions:


- Version A, with analogic control via voltage or RS232 serial line.
- Version D, with control via RS232 serial line or keyboard or voltage, with display of the set and regulated pressures.



TECHNICAL DATA		SPR 600 A and D	
Setting range	MPa	0.03 - 0.7	
	bar	0.3 - 7	
	psi	4 - 100	
Control pressure	MPa	0.1 - 0.8	
	bar	1 - 8	
	psi	15 - 115	
Temperature range	°C	-10°C to +50°C	
	°F	14 - 122	
Degree of protection		IP62 or IP65	
Weight	Kg	2.5	
Fluid		20 µm filtered air, de-humidified and unlubricated.	
Supply voltage		24 V DC	
Max. absorbed power	W	2	
Control		KEYBOARD / 0-5V / 0-10V / RS 232	
Flow rate at 6.3 bar ΔP 0.5 bar	Nl/min	12000	
		-	
		-	
		-	

### COMPONENTS


- ① Connection for power supply and serial line
- ② 3-digit digital display
- ③ Led
- ④ Instrument configuration and pressure setting keys

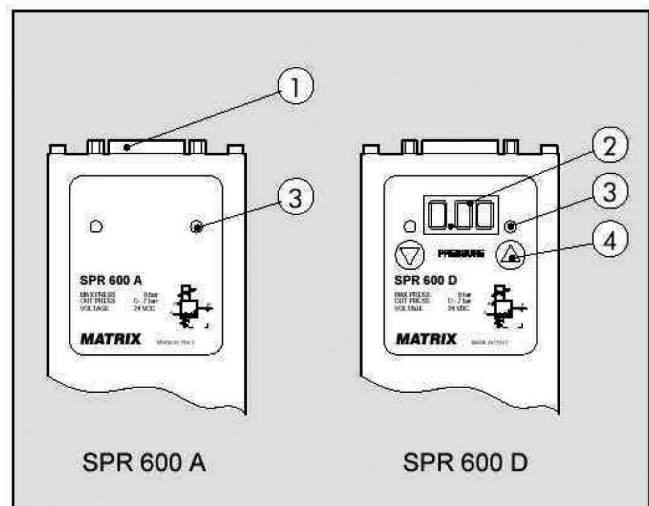

# SPR 600 A/D



## DIMENSIONS

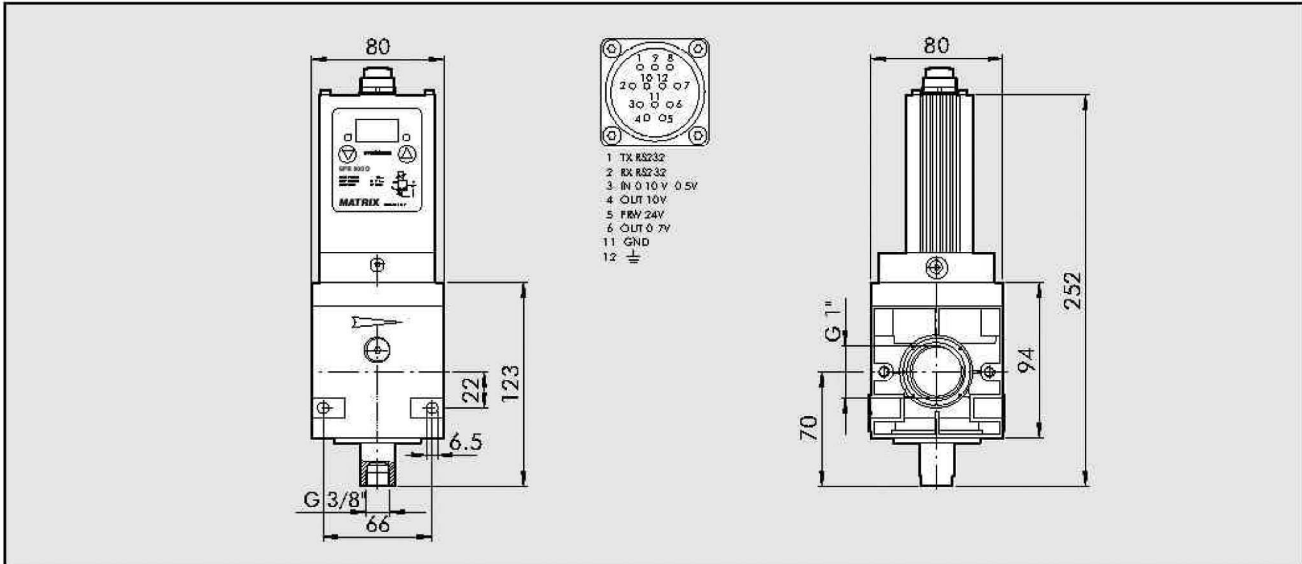

## NOTES

Blank area for notes.