


Fixed Displacement Radial Piston Staffa Motor HMB Series

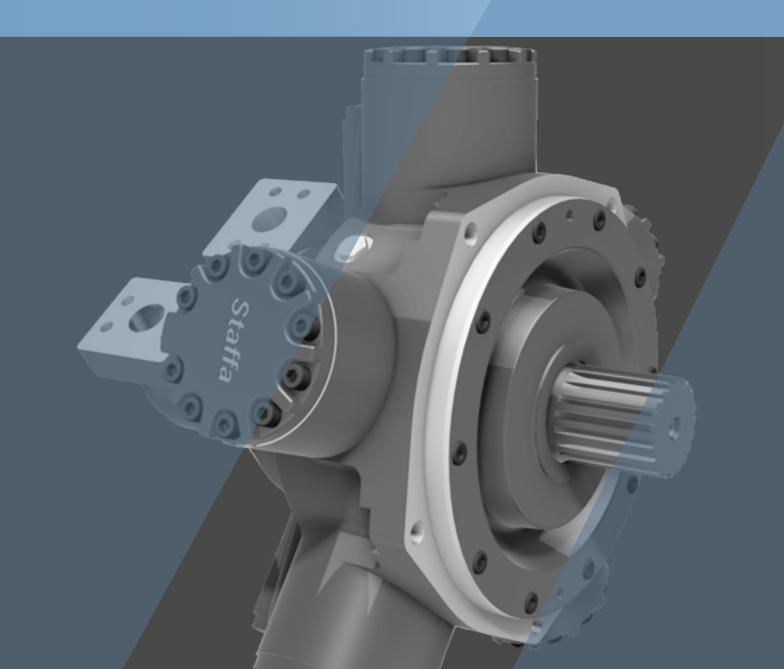

CONTENTS

Specifications and Features	3 - 4
1. Ordering Code	
1-1. Model Coding	5 - 6
2. Technical Information	
2-1. Performance Data	7 - 11
2-2. Volumetric Efficiency Data	12
2-3. Shaft Power Calculations	13
2-4. Functional Symbols	14
2-5. Shaft Stress Limits	15
2-6. Bearing Life Notes	16
2-7. Circuit and Application Notes	17 - 19
2-8. Motor Operation at Low Temperatures	20
2-9. Freewheeling Notes	21
2-10. Crankcase Drain Connections	22
2-11. Installation Data	23
2-12. Special Features	24 - 39
3. Dimensions	
3-1. HMB010 Installation	40 - 41
3-2. HMB030 Installation	42 - 46
3-3. HMB045 Installation	47 - 51
3-4. HMB060/080 Installation	52 - 56
3-5. HMB100 Installation	57 - 58
3-6. HM(HD)B125 Installation	59 - 69
3-7. HM(HD)B150/200 Installation	70 - 77
3-8. HM(HD)B270 Installation	78 - 83
3-9. HM(HD)B325 Installation	84 - 89
3-10. HMHDB400 Installation	90 - 91
3-11. HMB500 Installation	92 - 93

HMB Series

Fixed Displacement Radial Piston Hydraulic Motor



General Descriptions

The Kawasaki "Staffa" range of high torque low speed fixed displacement radial piston hydraulic motors consists of 13 frame sizes ranging from the HMB010 to HMB500. Capacity ranges from 188 to 8,000 cc/rev.

The rugged, well proven design incorporates high efficiency, combined with good breakout torque and smooth running capability.

Various features and options are available including, on request, mountings to match competitors' interfaces.

The Kawasaki "Staffa" range also includes dual and triple displacement motors. To obtain details of these product ranges please refer to datasheet M-2002/03.17 and M-2005/12.17 Features

Rugged, reliable, proven design

Unique hydrostatic balancing provides minimum wear and extended life

High volumetric and mechanical efficiency

Capacities range from 50 to 8,000 cc/rev

Large variety of shaft and porting options

Output torque up to 25,250 Nm

Wide range of mounting interfaces available

Alternative displacements also available

HMB Series

Specifications

Motor Type	Geometric displacement (cc/rev)	Average actual running torque (Nm/bar)	Max. continuous speed (rpm)	Max. continuous output (kW)	Max. continuous pressure (bar)	Max. intermittent pressure (bar)
НМВ010	188	2.79	500	25	207	241
НМВ030	442	6.56	450	42	207	241
HMB030 (FM3)	492	7.31	450	52	207	241
HMB045	740	10.95	400	60	250	293
НМВ060	983	14.5	300	80	250	293
НМВ080	1,344	19.9	300	100	250	293
HMB100	1,639	24.3	250	110	250	293
HMB125	2,050	30.66	220	100	250	293
HMHDB125	2,050	30.00	220	100	250	295
HMB150	2,470	36.95	220	115	250	293
HMHDB150						
HMB150 (FM3)	2,470	36.95	168	115	250	293
НМВ200	3,087	46.07	175	130	250	293
HMHDB200	3,007	+0.07	175	150	230	233
HMB200 (FM3)	3,087	46.07	135	130	250	293
HMB270	4,310	63.79	125	140	250	293
HMHDB270	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	00.79	125	1 10	2.50	233
HMB325	5,310	79.4	100	140	250	293
HMHDB325	5,510	, J.4	100	140	200	295
HMHDB400	6,800	101	120	190	250	293
НМВ500	8,000	114	100	170	190	227

Other non standard displacements are possible - check with KPM UK for details.


Ordering Code

1-1 Model Coding

1

Fluid T				
Blank	Mineral oil			
F3	Phosphate ester (HFD fluid)			
F11	Water based fluids (HFA, HFB & HFC)			
Alterna	ative fluids contact Kawasaki			
НМВ	Standard			
Model	Туре			
HMB	Standard			
HMHD	Heavy duty			
* For B4 is availa	00 frame size, only Heavy Duty (HMHDB) able.			
Motor	Frame Size			
See op	ptions page 4			
Shaft T	Гуре			
	aft type options in installation drawings			
	are type options in instantion drawings			
	1 1			
See sh				
See sh	Drientation			
See sh				

See Port Connection options in installation drawings.

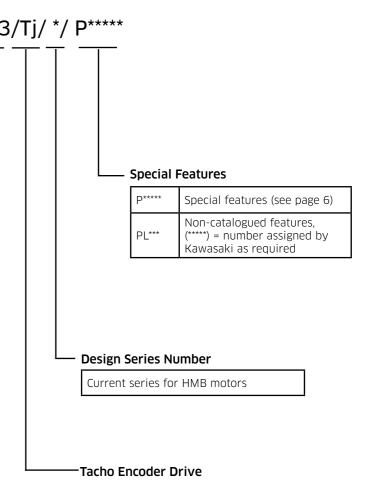


Blank	None
Tj*	Square wave output with directional signal*
Tk	Combines Tj with the T401 instrument to give a 4 to 20 mA output proportional to speed. Directional signal and speed relay output.

See page 39 * Not available for B010 frame size.

1-1 Model Coding



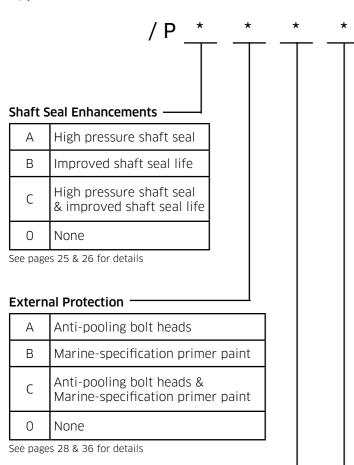

Installation Features

А	Drain port adaptor x 1
В	Drain port adaptor x 2
С	Φ21 mm mounting holes
D	Φ22 mm mounting holes
E	Φ 21 mm mounting holes & Drain port adaptor x 1
F	Φ 21 mm mounting holes & Drain port adaptor x 2
G	Φ 22 mm mounting holes & Drain port adaptor x 1
Н	Φ 22 mm mounting holes & Drain port adaptor x 2
0	None

See pages 34 & 35 for details

Valve Enhancements

А	Improved cavitation resistance
В	Anti-clockwise
С	Thermal shock resistance
D	Improved caviation resistance & anti-clockwise
E	Improved cavitation resistance & thermal shock resistance
F	Anti-clockwise & thermal shock resistance
G	Improved cavitation resistance & anti-clockwise & thermal shock resistance
0	None
See page	s 27, 31 & 32 for details

Performance Enhancements

А	Increased starting torque
В	Increased power rating
С	Increased starting torque & increased power rating
0	None

See pages 30 & 37-8 for details

Technical Information

2-1 Performance Data

Rating definitions

Continuous rating

For continuous duty the motor must be operating within each of the maximum values for speed, pressure and power.

Intermittent rating

Operation within the intermittent power rating (up to the maximum continuous speed) is permitted on a 15% duty basis, for periods up to 5 minutes maximum.

Intermittent max pressure

This pressure is allowable on the following basis:

a) Up to 50rpm 15% duty for periods up to 5 minutes maximum. b) Over 50 rpm 2% duty for periods up to 30 seconds maximum.

Static pressure to DNV rules 405 bar (except HMB010 and HMB030 motors).

Limits for fire resistant fluids

Fluid Type	Continuous Pressure (bar)	Intermittent Pressure (bar)	Max Speed (rpm)	Model Type
HFA 5/95 oil-in-water emulsion	130	138	50% of limits of mineral oil	All models
HFB 60/40 water-in-oil emulsion	138	172	As for mineral oil	All models
HFC water glycol	103	138	50% of limits of mineral oil	All models
	207	241	As for mineral oil	HMB010
HFD	207	293	As for mineral oil	НМВОЗО
phosphate ester	250	293	As for mineral oil	HMB045 to HMHDBB400 inc.
	190	227	As for mineral oil	HMB500


2-1 Performance Data (cont)


Output Torque Curves

These torque curves indicate the maximum output torque and power of a fully run-in motor for a range of pressures and speeds when operating with zero outlet pressure on Mineral Oil of 50 cSt (232 SUS) viscosity. High return line pressures will reduce torque for a given pressure differential. - x - x - x - Upper limit of continuous rating envelope.


HMB010


HMB030

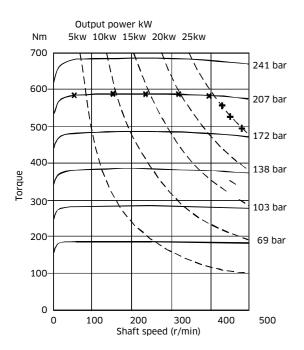



HMB030 2-piece




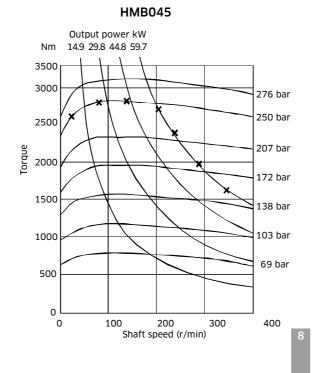


2-1 Performance Data (cont)


Output Torque Curves (cont)

HMB060




HMB100

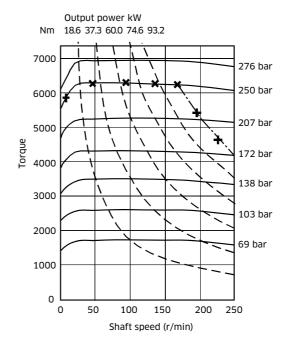



HM(HD)B125




HMB080


2-1 Performance Data (cont)

Output Torque Curves (cont)

HM(HD)B150




HM(HD)B200




2-1 Performance Data (cont)

Output Torque Curves (cont)


HMHDB400




HM(HD)B270



HM(HD)B325

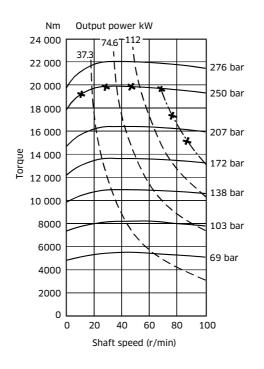



HMB500

2-2 Volumetric Efficiency Data

Motor Type	Geometric Displacement	Zero Speed Constant	Speed Constant	Creep Speed Constant	Crankcase Leakage Constant	Flui Viscos
НМВ	cc/rev	K ₁	K ₂	K ₃	K ₄	cSt
HMB010	188	1.34	534.05	7.31	0.51	
HMB030	442	1.04	57.67	2.47	0.59	20
2-piece HMB030	492	1.04	57.67	2.47	0.59	
HMB045	740	1.92	43.36	2.71	1.76	25
HMB060	983	1.72	29.91	2.35	1.88	
HMB080	1,344	1.71	21.62	1.84	1.84	30
HMB100	1,639	1.83	17.74	1.41	1.88	
HM(HD)B125	2,050	2.06	11.45	1.24	1.35	40
HM(HD)B150	2,470	1.62	9.98	1.00	1.39	
HM(HD)B200	3,080	2.53	14.99	0.78	1.39	50
HM(HD)B270	4,310	3.17	21.16	0.68	1.80	50
HM(HD)B325	5,310	3.14	18.21	0.55	1.80	60
HMHDB400	6,800	4.06	10.18	0.53	2.35	60
HMB500	8,000	9.247	78.247	1.739	5.797	


Qt (total leakage)	= [K1 + n/K2] x ΔP x Kv x 0.005	l/min
Creep speed	= K3 x ΔP x Kv x 0.005	rpm
Crankcase leakage	= K4 x ΔP x Kv x 0.005	l/min
ΔΡ	= differential pressure	bar
n	= speed	rpm

The motor volumetric efficiency can be calculated as follows:

Volumetric efficiency (%) = $\left[\frac{(\text{speed x disp.})}{(\text{speed x disp.}) + Qt}\right] \times 100$

Example:

HMB200 motor with displacement of 3.080 l/rev.		
Speed	60 rpm	
Differential pressure	200 bar	
Fluid viscosity	50 cSt	



Volumetric efficiency = $\left[\frac{(60 \times 3.080)}{(60 \times 3.080) + 6.53}\right]$ x 100 = <u>96.5%</u>

Fluid Viscosity	Viscosity Factor
cSt	Κv
20	1.58
25	1.44
30	1.30
40	1.10
50	1.00
60	0.88

2-3 Shaft Power Calculation

Example (see page 4)

Firstly, to find the maximum differential pressure ΔP at rated speed:

Select the rated shaft power (W) for the motor from the performance data table (page 4). This is presented in kilowatts so must be converted to watts (x1000).

Then also take the Actual Average running torque in N.m/bar (T_0) and the rated shaft speed in rpm (n).

W = $\underline{T_o} \cdot \Delta P \cdot 2\pi \cdot n$

HMB270 Example:

Rated shaft power, W (W):

Rated shaft speed, n (rpm):

Average actual running torque, T_o (Nm/bar):

 $\Delta P = \frac{60.W}{2\pi . T_0.n}$

Or to find maximum ΔP then use:

140,000

63.79

125

∆P = 60 x 140,000

 $\frac{1}{2\pi \times 63.79 \times 125}$

<u>ΔP= 167 bar (max.)</u>

Secondly, to find the maximum speed at rated pressure (using the same information as before):

Rated pressure (bar):

250

$$n = \frac{60 \times 140,000}{2\pi \times 63.79 \times 250}$$

<u>n = 83 rpm (max.)</u>


In summary, operating the motor within its shaft power limit, at rated speed, would give a maximum pressure of 167 bar, and operating the motor at rated pressure, would give a maximum speed of 83 rpm.


Notes


The maximum calculated speed is based on a rated inlet pressure of 250 bar.
The maximum shaft power is only allowable if the motor drain temperature remains below 80°C.
The maximum calculated differential pressure assumes that the low pressure motor port is less than 30 bar.


2


2-4 Functional Symbols





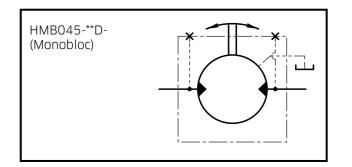



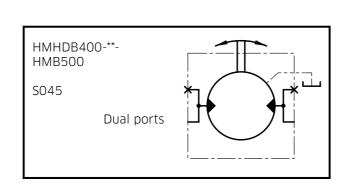

2-5 Stress Limits

When applying large external radial loads, consideration should also be given to motor bearing lives (see page 16).


Motor Frame Size	Shaft Types	Maximum External Radial Bending Moment [Nm]
HMB010	P, S	1,550
НМВ030	P, S & Z	2,400
HMB045	P, S & Z	3,240
HM060, 080 & 100	P, S, Z & T	5,500
HMB125, 150 & 200	P1, S3, S4, Z3, & T	6,600
HMHDB125, 150, 200	S5, Z5 & P2	12,750
HMB270 & 325	P1, S3, Z3 & T	7,500
HMHDB270 & 325	P2, S5 & Z5	15,900
HMHDB400	P, S & Z	16,200
HMB500	P, S & Z	16,200

Example:

Determine the maximum radial shaft load of a HMB080 motor:

Radial load offset, A Maximum radial load, W

= 100 mm = 5,500 (see table)/100 = 55 kN (5,607 kg)



[Note}

A = Distance from mounting face to load centre (mm)

W = Side load (N)

The offset distance A is assumed to be greater than 50 mm. Contact KPM UK if this is not the case.

2-6 Bearing Life Notes

Consideration should be given to the required motor bearing life in terms of baring service life. The factors that will determine bearing life include:

1) Duty cycle - time spent on and off load

2) Speed

3) Differential pressure

4) Fluid viscosity

5) External radial shaft load

6) External axial shaft load

[NOTE]

A heavy duty HM(HD)B motor can be ordered to further improve bearing life. Consult KPM UK if you need a detailed bearing life calculation.

2-7 Circuit and Application Notes

Starting torque

The starting torques shown on the graphs on pages 8 to 11 are average and will vary with system parameters.



Minimum operating speeds are determined by the hydraulic system and load conditions (load inertia, drive elasticity, etc.) Recommended minimum speeds are shown below:

Model Type	rpm
HMB010	20
НМВ030	5
HMB045	6
HMB060/080/100	3
HM(HD)B/125/150/200	3
HM(HD)B270/325	2
HMHDB400/HMB500	2

High Back Pressure

When both inlet and outlet ports are pressurised continuously, the lower port pressure must not exceed 70 bar at any time.

Note: High back pressure reduces the effective torque output of the motor.



When operating as a motor the outlet pressure should equal or exceed the crankcase pressure. If pumping occurs (i.e. overrunning loads) then a positive pressure, "P", is required at the motor ports. Calculate "P" (bar) from the operating formula Boost Formula P= $1+\frac{N^2 \times V^2}{V} + C$

К

Where P is in bar, N = motor speed (rpm), V = motor displacement (cc/rev), C = Crankcase pressure (bar) and K=a constant from the table below:

Motor	Porting	Constant (K)
HMB010	Standard	8.0 x 10 ⁸
HMB030	Standard - Monobloc	3.7 x 10°
ПИВОЗО	F(M)3 SM3	7.5 x 10°
HMB045	Standard - Monobloc	1.3 x 10 ¹⁰
ПИВО45	F(M)3 SM3	1.6 x 10 ¹⁰
HMB060, HMB080 & HMB100	F(M)3 SM3	1.8 × 10 ¹⁰
HM(HD)B125, HM(HD)B150 &	FM(3) SM3	4.0 × 10 ¹⁰
HM(HD)B200	FM(4)	8.0 × 10 ¹⁰
HM(HD)B270 & HM(HD)B325	FM(4)	7.2 x 10 ¹⁰
HMHDB400 & HMB500	S045	7.2 × 10 ¹⁰

2-7 Circuit and Application Notes (cont)

The flow rate of oil needed for the make-up system can be estimated from the crankcase leakage data (see page 12 for calculation method). Allowances should be made for other system losses and also for "fair wear and tear" during the life of the motor, pump and system components.



Operating within the continuous rating does not require any additional cooling.

For operating conditions above "continuous", up to the "intermittent" rating, additional cooling oil may be required. This can be introduced through the spare crankcase drain holes, or in special cases through the valve spool end cap.

Consult KPM UK about such applications.

Motorcase pressure

With the standard shaft seal fitted, the motor casing pressure should not exceed 3.5 bar.

Notes

- 1) The casing pressure at all times must not exceed either the motor inlet or outlet pressure.
- 2) High pressure shaft seals are available for casing pressures of: 9 bar for HMB010

10 bar for all remaining frame sizes.

3) Check installation dimensions for maximum crankcase drain fitting depth.

Â CAUTION

For trouble free operation the motor's crankcase pressure must always be lower than both of the motor port pressures:

 $P_{case} < P_{in}$ and $P_{case} < P_{out}$

Hvdraulic Fluids

Dependent on motor (see model code fluid type - page 5) suitable fluids include:

- a) Antiwear hydraulic oils
- b) Phosphate ester (HFD fluids)
- C) Water glycols (HFC fluids)
- 60/40% water-in-oil emulsions (HFB fluids) d)
- e) 5/95% oil-in-water emulsions (HFA fluids)

Reduce pressure and speed limits, as per table on page 23.

Viscosity limits when using any fluid except oil-in-water (5/95) emulsions are:

Max. off load:	2,000 cSt (9270 SUS)
Max. on load:	150 cSt (695 SUS)
Optimum:	50 cSt (232 SUS)
Minimum:	25 cSt (119 SUS)

Temperature limits

Ambient min.	-30°C (-22°F)				
Ambient max.	+70°C (158°F)				
Max. operating tempera	ture range.				
Mineral oil	Water containing				
Mineral oil Min -20°C (-4°F)	Water containing +10°C (50°F)				

Note: To obtain optimum services life from both fluid and hydraulic systems components, a fluid operating temperature of 40°C is recommended.

2-7 Circuit and Application Notes (cont)

Mineral oil recommendations

The fluid should be a good hydraulic grade, nondetergent Mineral Oil. It should contain anti-oxidant, antifoam and demulsifying additives. It must contain antiwear or EP additives. Automatic transmission fluids and motor oils are not recommended.

Biodegradable Fluid Recommendations

Well-designed environmentally acceptable lubricants (EALs) may be used with Staffa motors. The EAL must be designed for use in hydraulic systems and have a synthetic ester base. Additives should be as listed for mineral oils, above. The performance of EALs with hydraulic systems vary widely and so checks for seal compatibility, copper alloy compatibility, oxidation resistance and lubrication properties should be carried out before selecting an EAL. For help with EALs please contact KPMUK.

Polar moment of intertia and mass table

Motor Frame Size	Polar Moment of Intertia (kg.m²) (Typical data)	Mass (kg) (Approx. all models)
HMB010	0.0076	40
НМВ030	0.0150	73
HMB045	0.0470	120
HMB060	0.0500	144
HMB080	0.0600	144
HMB100	0.0760	144
HMB125	0.2200	217
HMB150	0.2500	265
HMB200	0.2700	265
HMB270	0.4900	420
HMB325	0.5000	429
HMHDB400 - S04	0.5400	481
HMHDB400 - S05	0.5400	510
HMB500	0.5400	510

Filtration

Full flow filtration (open circuit), or full boost flow filtration (close circuit) to ensure system cleanliness to ISO4406/1986 code 18/14 or cleaner.

Noise levels

The airborne noise level is less than 66.7 dB(A) DIN & dB(A) NFPA through the "continuous" operating envelope. Where noise is a critical factor, installation resonances can be reduced by isolating the motor by elastomeric means from the structure and the return line installation. Potential return line resonances originating from liquid borne noise can be further attenuated by providing a return line back pressure of 2 to 5 bar.

2-8 Motor Operation at Low Temperature

When operating the motor at low temperature consideration should be given to the fluid viscosity. The maximum fluid viscosity before the shaft should be turned is 2,000 cSt. The maximum fluid viscosity before load is applied to the motor shaft is 150 cSt.

If low ambient temperature conditions exist, then a crankcase flushing flow of at least 5 I/min should be applied to the motor during periods when the motor is not in use.

The shaft seal temperature limits for both medium and high pressure applications are shown in the table below.

	Non-operating temperature limits	Minimum operating temperature
Standard pressure shaft seal	below minus 40°C and above 100°C	minus 30°C
High pressure shaft seal	below minus 30°C and above 120°C	minus 15°C

All seals are very brittle below minus 40°C and are likely to break very easily and due to their sluggish response may not provide a 100% leak free condition.

It should be noted that the maximum continuous operating temperature within the motor crankcase is plus 80°C.

2-9 Freewheeling Notes

All Staffa motors can be used in freewheeling applications.

In all circumstances it is essential that the motor is unloaded ("A" and "B" ports connected together) and that the circuit is boosted.

The required boost pressure is dependent on both the speed and displacement conditions.

It should be noted that for "HMB" series motors, to achieve freewheel, large flows will have to re-circulate around the motor.

This will require a large recirculating valve and consideration of circuit cooling as the motor will be generating a braking torque.


It is for these reasons that "HMC", "HPC" or "HMF" series motors are the preferred option for freewheeling applications.

See catalogues M-2002/03.17, M-2003/03.17 and M-2005/12.17 for details.

2-10 Crankcase Drain Connections

Motor axis - horizontal


The recommended minimum pipe size for drain line lengths up to approx. 5m is 12.0 mm $(\frac{1}{2})$ bore. Longer drain lines should have their bore size increased to keep the crankcase pressure within limits.

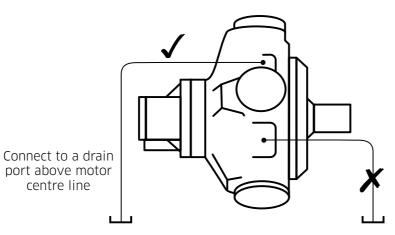




Motor axis - vertical shaft up

Specify "V" within the model code for extra drain port, G¼" (BSPF). Connect this port into the main drain line downstream of a 0.35 bar check valve to ensure good bearing lubrication. The piping arrangement must not allow syphoning from the motorcase. (refer to installation drawing for details).

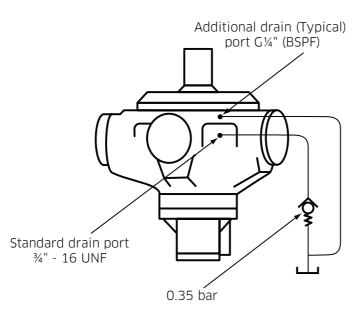

Motor axis - vertical shaft down

The piping, from any drain port, must be taken above the level of the motorcase to ensure good bearing lubrication. The arrangement must not allow syphoning from the motorcase.



2-11 Installation Data

Spigot

The motor should be located by the mounting spigot on a flat, robust surface using correctly sized bolts.

The diametrical clearance between the motor spigot and the mounting must not exceed 0.15 mm. If the application incurs shock loading, frequent reversing or high speed running, then high tensile bolts should be used, including one fitted bolt.



The recommended torque wrench setting for bolts is as follows:

97 +/- 7Nm 160 +/- 21Nm 312 +/- 14 Nm 407 +/- 14 Nm 690 +/- 27 Nm 97 +/- 7 Nm 265 +/- 14 Nm 393 +/- 14 Nm	Sha Wh bea
810 +/- 27 Nm	
	160 +/- 21Nm 312 +/- 14 Nm 407 +/- 14 Nm 690 +/- 27 Nm 97 +/- 7 Nm 265 +/- 14 Nm 393 +/- 14 Nm

End of Motor Life

The motor unit, hydraulic fluid and packaging must be disposed of carefully to avoid pollution to the environment. The motor unit must be completely empty upon disposal, it must be disposed of according to national regulations and you must also follow safety information for disposal of the hydraulic fluid.

All individual parts of the motor unit must be recycled. Separate the motor unit parts according to: cast parts, steel, aluminium, non-ferrous metal, electronic waste, plastic, and seals.

naft coupling:

here the motor is solidly coupled to a shaft having independent arings the shaft must be aligned to within 0.13 mm TIR.

2-12 Special Features


Feature	Page	HMB 010	HMB 030	HMB 030 -F(M)3 HMB 030 -SM3	HMB 045	HMB 045 - F(M)3 HMB 045 - SM3	HMB 060/ 080	HMB 100	HM(HD)B 125	HM(HD)B 150/ 200	HM(HD)B 270	HM(HD)B 325	НМНDВ 400	HMB 500
High Pressure Shaft Seal	9	0	•	•	•	•	•	•	•	•	•	•	•	•
Improved Shaft Seal Life	10	•	•	•	•	•	•	•	•	•	•	•	•	•
Improved Cavitation Resistance	11	0	0	•	0	•	•	•	•	•	•	•	•	•
Anti-pooling Bolt Heads	12	•	•	•	•	•	•	•	•	•	•	•	•	•
Increased Starting Torque	13	•	•	•	•	•	•	•	•	•	•	•	•	0
Anti-clock- wise Rotation	15	•	•	•	•	•	•	•	•	•	•	•	•	•
Thermal Shock Resistance	16	0	0	•	о	•	•	•	•	•	•	•	•	0
Drain Port Adaptor - ½" BSPP	18	•	•	•	•	•	•	•	•	•	•	•	•	•
Φ21mm Mounting Holes	19	0	0	0	0	0	•	•	•	•	•	•	•	•
Ф22mm Mounting Holes	19	0	0	0	0	0	•	•	•	•	•	•	•	•
Marine- specification Primer Paint	20	•	•	•	•	•	•	•	•	•	•	•	•	•
Increased Power Rating	21	0	0	0	0	0	0	0	•	•	•	•	•	0

Available

O Not available

2-12 Special Features (cont)

High Pressure Shaft Seal

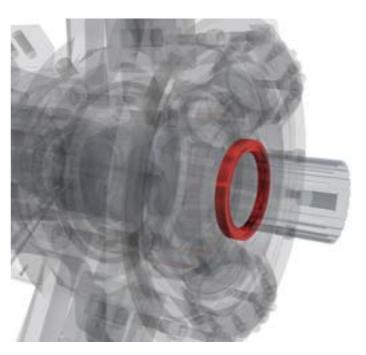

Technical Information

Where crankcase pressure will be higher than 3.5 bar, the high pressure shaft seal should be selected.

Case pressure	<u><</u> 10 bar
Non-operating temperature limits	Below -30°C and above 120°C
Minimum operating temperature	-15°C
Maximum operating temperature	80°C
Minimum viscosity	2,000 cSt
Maximum viscosity	150 cSt

Applicable to:

НМ 010		HMB 030 -F(M)3/ SM3	HMB 045	HMB 045 -F(M)3/ SM3	HMB 060/ 080	HMB 100	HM(HD)B 125	HM(HD)B 150/200	HM(HD)B 270	HM(HD)B 325	HMHDB 400	HMB 500
•	•	•	•	•	•	•	•	•	•	•	•	•


Description:

- > 10 bar rated
- > Recommended for cold climates
- > Rugged aluminium construction



2-12 Special Features (cont)

Improved Shaft Seal Life

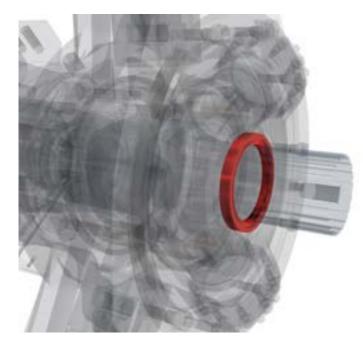

Description:


- > Stainless steel sleeve prevents corrosion
- > Improved wear resistance
- > Recommended for corrosive environments

2-12 Special Features (cont)

Improved Cavitation Resistance

Description:

- > Recommended for overunning applications
- > Protects against seal damage for short periods of operation in vacuum inlet conditions.



Technical Information

A well-established method of increasing rotary seal life in corrosive environments is to fit a thin-walled, stainless steel sleeve to the rotating shaft to provide a corrosion-resistant, wear-resistant counterface surface for the seal to run against. All HMB motors can be fitted with such sleeves upon request.

Sleeve material	A304/301 Stainless Steel
Sleeve surface finish	$R_{a}^{}$ 0.25 to 0.5 μm (10 to 20 $\mu in)$

Applicable to:

HMB 010	HMB 030	HMB 030 -F(M)3/ SM3	HMB 045	HMB 045 -F(M)3/ SM3	HMB 060/ 080	HMB 100	HM(HD)B 125	HM(HD)B 150/200	HM(HD)B 270	HM(HD)B 325	HMHDB 400	HMB 500
•	•	•	•	•	•	•	•	•	•	•	•	•

Please contact Kawasaki to order this feature.

Cavitation can occur due to many different factors. Although it is not possible to make the HMB motor resistant to cavitation, certain features can be added to improve the motor's resistance to short periods of lost port pressure.

In applications where the HMB motor can be driven (like a pump) a risk arises that insufficient fluid will be provided to maintain a positive pressure at both main ports of the motor causing cavitation. The results of extended running at these conditions can be catastrophic to the motor's function.

The improved cavitation resistance feature should be considered where:


- Overrunning conditions may occur (load driving the motor)
- Loss of main port pressure while motor is rotating

Note:

This feature comes as standard on monobloc HMB motors (HMB010, HMB030, HMB045).


Applicable to:

HMB 010	HMB 030	HMB 030 -F(M)3/ SM3	HMB 045	HMB 045 -F(M)3/ SM3	HMB 060/ 080	HMB 100	HM(HD)B 125	HM(HD)B 150/200	HM(HD)B 270	HM(HD)B 325	HMHDB 400	HMB 500
0	0	0	0	•	•	•	•	•	•	•	•	•



2-12 Special Features (cont)

Anti-pooling Bolt Heads

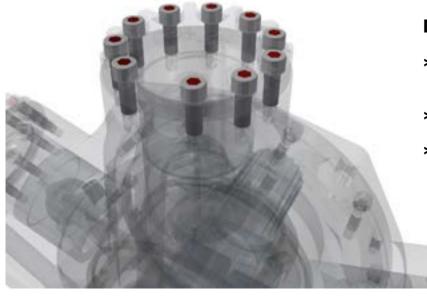

Description:

- > Removes potential for water pooling
- > Improved corrosion resistance
- > Recommended for marine environments

2-12 Special Features (cont)

Increased Starting Torque

Description:

- > Optimised for high break-out torque
- > Recommended for low speed operation
- > Improved service life for low speed applications

Technical Information

In many marine applications, water pooling in socket head cap screw heads presents a significant corrosion risk. Corroded cap screws can make service and repair of affected units impossible.

To significantly reduce the risk of water damage through pooling, HMB motors can be supplied with silicone filler in all the bolt heads.

Applicable to:

НМЕ 010	HMB 030	HMB 030 -F(M)3/ SM3	HMB 045	HMB 045 -F(M)3/ SM3	HMB 060/ 080	HMB 100	HM(HD)B 125	HM(HD)B 150/200	HM(HD)B 270	HM(HD)B 325	HMHDB 400	HMB 500
•	•	•	•	•	•	•	•	•	•	•	•	•

Please contact Kawasaki to order this feature.


Technical Information

If an application demands the drive motor be run at speeds of less than 10 rpm for most of the duty cycle, or involves frequent start/stop or forward/reverse operation, the Staffa HMB motor range has it covered.

By optimising the HMB motor's design for low speeds, it is possible to increase the break out torque and low speed mechanical efficiency performance.

Torque

All figures given in Section 2-1 Performance Data are still valid when selecting this feature.



Inc	reased sta	rting	
tord	que option		

Shaft speed

Increased Starting Torque (cont)

Volumetric Performance

In order to achieve increased torque at low speeds the volumetric characteristics of the motor performance are changed.

When calculating leakage and volumetric efficiency use the constants shown here in place of those given for the standard motor on page 29.

Motor Type	Geometric Displacement	Zero Speed Constant	Speed Constant	Creep Speed Constant	Crankcase Leakage Constant
	cc/rev	К1	К2	К3	К4
HMB010	188	8.80	534.05	47.05	7.98
НМВОЗО	442	8.51	57.67	19.37	8.06
2-piece HMB030	492	8.51	57.67	19.37	8.06
HMB045	740	3.93	43.36	12.80	9.23
HMB060	983	9.19	29.91	9.95	9.35
HMB080	1,344	9.18	21.62	7.39	9.31
HMB100	1,639	9.30	17.74	5.47	9.35
HM(HD)B125	2,050	9.53	11.45	4.88	8.82
HM(HD)B150	2,470	9.09	9.98	4.02	8.86
HM(HD)B200	3,080	10.00	14.99	3.20	8.86
HM(HD)B270	4,310	13.63	21.16	3.11	12.26
HM(HD)B325	5,310	13.60	18.21	2.52	12.26
HMHDB400	6,800	19.00	10.18	2.73	17.29

Applicable to:

HMB 010	HMB 030	HMB 030 -F(M)3/ SM3	HMB 045	HMB 045 -F(M)3/ SM3	HMB 060/ 080	HMB 100	HM(HD)B 125	HM(HD)B 150/200	HM(HD)B 270	HM(HD)B 325	HMHDB 400	HMB 500
•	•	●	•	•	•	•	•	•	•	•	•	0

2-12 Special Features (cont)


Anti-Clockwise Rotation

Description:

- > Reduce installation complexity
- > Standardise equipment designs

Technical Information

All HMB motors can be specified with an anti-clockwise rotation valve configuration. All performance and volumetric characteristics remain unchanged.

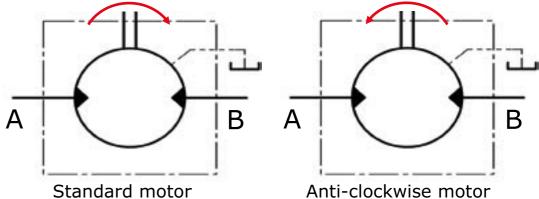


Applicable to:


HM 010		HMB 030 -F(M)3/ SM3	HMB 045	HMB 045 -F(M)3/ SM3	HMB 060/ 080	HMB 100	HM(HD)B 125	HM(HD)B 150/200	HM(HD)B 270	HM(HD)B 325	HMHDB 400	HMB 500
•	•	•	•	•	•	•	•	•	•	•	•	•

Please contact Kawasaki to order this feature.





Thermal Shock Resistance

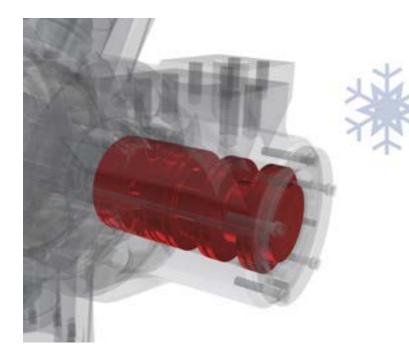

Description:

- > Recommended for cold climates
- > Optimised for start-up in freezing temperatures
- > Engineered for total peace of mind

2-12 Special Features (cont)

Thermal Shock Resistance (cont)

Motor Type	Geometric Displacement	Zero Speed Constant	Speed Constant	Creep Speed Constant	Crankcase Leakage Constant
	cc/rev	K1	К2	КЗ	К4
HMB060	983	3.72	29.91	4.39	1.88
HMB080	1,344	3.71	21.62	3.32	1.84
HMB100	1,839	3.83	17.74	2.50	1.88
HM(HD)B125	2,050	4.41	11.45	2.21	1.35
HM(HD)B150	2,470	3.97	9.98	1.81	1.39
HM(HD)B200	3,080	4.88	14.99	1.43	1.39
HM(HD)B270	4,310	5.52	21.16	1.23	1.80
HM(HD)B325	5,310	5.49	18.21	0.99	1.80
HMHDB400	6,800	6.41	10.18	0.88	2.35

Technical Information

Starting up a cold system with warm hydraulic fluid is a known cause of heavy wear and potential seizure of hydraulic machinery. To minimise this potential risk, the HMB motor can be configured to combat thermal shocks to give complete peace of mind when operating in very cold climates.

Volumetric Performance

In order to provide thermal shock resistance the volumetric characteristics of the motor performance are changed. When calculating leakage and volumetric efficiency use the constants shown on the next page in place of those given for the standard motor on page 29.

All figures given in Section 2-1 Performance Data are still valid when selecting this feature.

Note:

When operating at low temperature, consideration must be given to the guidance notes in Section 2-8 Motor Operation at Low Temperature (see page 20).

Applicable to:


HMB 010	HMB 030	HMB 030 -F(M)3/ SM3	HMB 045	HMB 045 -F(M)3/ SM3	HMB 060/ 080	HMB 100	HM(HD)B 125	HM(HD)B 150/200	HM(HD)B 270	HM(HD)B 325	HMHDB 400	HMB 500
0	0	0	0	•	•	•	•	•	•	•	•	0

Please contact Kawasaki to order this feature.

Drain Port Adaptors

Description:

- > Improves manufacturing logistics
- > Motor supplied ready for connection to ½" BSPP male fitting

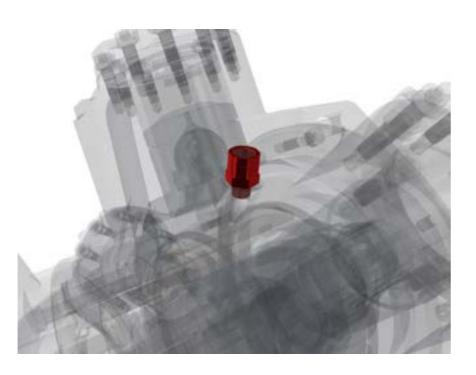

Technical Information

Motor Type	Adaptor Supplied
HMB010	¾" BSP to ½" BSPP
НМВ030	¾" BSP to ½" BSPP
HMB045	¾" BSP to ½" BSPP
HMB045-F(M)3/SM3	¾" UNF 2B to ½" BSPP
НМВО60	34" UNF 2B to ½" BSPP
HMB080	¾" UNF 2B to ½" BSPP
HMB100	¾" UNF 2B to ½" BSPP

Motor Type	Adaptor Supplied
HM(HD)B125	¾" UNF 2B to ½" BSPP
HM(HD)B150	¾" UNF 2B to ½" BSPP
HM(HD)B200	¾" UNF 2B to ½" BSPP
HM(HD)B270	¾" UNF 2B to ½" BSPP
HM(HD)B325	¾" UNF 2B to ½" BSPP
HMHDB400	¾" UNF 2B to ½" BSPP
HMB500	¾" UNF 2B to ½" BSPP


One or two drain adaptors can be supplied.

Applicable to:

HMB 010	HMB 030	HMB 030 -F(M)3/ SM3	HMB 045	HMB 045 -F(M)3/ SM3	HMB 060/ 080	HMB 100	HM(HD)B 125	HM(HD)B 150/200	HM(HD)B 270	HM(HD)B 325	HMHDB 400	HMB 500
•	•	•	•	•	•	•	•	•	•	•	•	•

2-12 Special Features (cont)

Mounting Hole Diameter

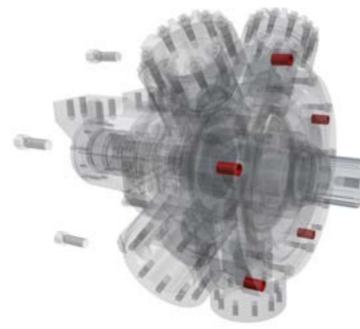

Technical Information

In different markets, different bolt standards are adopted which may not be best suited to the standard Φ 20 mm mounting hole diameter on the HMB motors. To give a correct fit and optimum installation, Φ 21 mm or Φ 22 mm holes can be selected on larger frame sizes.



Applicable to:

HMB 010	HMB 030	HMB 030 -F(M)3/ SM3	HMB 045	HMB 045 -F(M)3/ SM3	HMB 060/ 080	HMB 100	HM(HD)B 125	HM(HD)B 150/200	HM(HD)B 270	HM(HD)B 325	HMHDB 400	HMB 500
0	0	0	0	0	•	•	•	•	•	•	•	•

Please contact Kawasaki to order this feature.

Description:

> Matching mounting holes to bolts



> Φ21mm and Φ22mm options available



2-12 Special Features (cont)

Marine Specification Primer Paint



Description:

- > Improves corrosion and water resistance of the finishing system
- > Excellent adhesion strength
- > Recommended for marine applications

2-12 Special Features (cont)

High Power

Description:

- > Enhanced power performance
- > Improved efficiency
- > Improved back pressure rating of 100 bar

Technical Information

Colour	Red oxide
Туре	Single pack epoxy etching primer
Standard	BS 3900 part A 8
Dry film thickness	> 12 µm

Applicable to:

HMB 010	HMB 030	HMB 030 -F(M)3/ SM3	HMB 045	HMB 045 -F(M)3/ SM3	HMB 060/ 080	HMB 100	HM(HD)B 125	HM(HD)B 150/200	HM(HD)B 270	HM(HD)B 325	HMHDB 400	HMB 500
•	•	•	•	•	•	•	•	•	•	•	•	•


Please contact Kawasaki to order this feature.


Technical Information

The high power option for the HMB motors combines special low-friction components and a crankcase flushing flow to achieve increased shaft power limits. All other performance parameters are unchanged.

Crankcase Flushing

In order to achieve the maximum shaft power, a crankcase flushing flow of 15 l/min should be directed through the crankcase. To improve the cooling effect of the flushing flow the distance between the inlet and outlet drain port connections should be maximised.

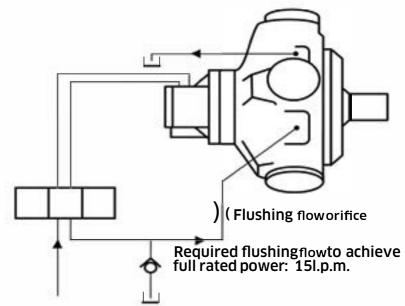

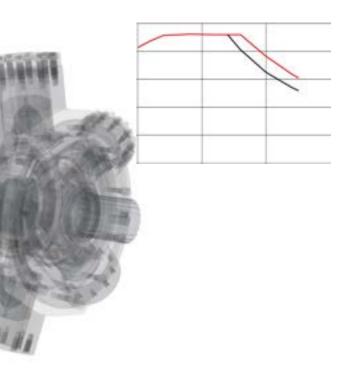

High Power (cont)

Check valve pressure (bar)*	Orifice diameter (mm)
3	4.4
4	4.1
5	3.9
6	3.7
7	3.6
8	3.5
9	3.4
10	3.3

*This assumes that the crankcase pressure is zero. If not, then the check valve pressure will need to be increased to maintain the pressure drop across the orifice.

Note:

If, due to crankcase flushing flow, the crankcase pressure continuously exceeds 3.5 bar, then the motor build should include a high pressure shaft seal.

Performance Data (crankcase flushing required):

Motor Type	Max. continuous output (kW)	Average actual running torque (Nm/bar)
HM(HD)B125	150	30.8
HM(HD)B150	160	37.3
HM(HD)B200	190	46.6
HM(HD)B270	210	64.1
HM(HD)B325	210	80.4
HMHDB400	280	101.4

Applicable to:

HMB 010	HMB 030	HMB 030 -F(M)3/ SM3	HMB 045	HMB 045 -F(M)3/ SM3	HMB 060/ 080	HMB 100	HM(HD)B 125	HM(HD)B 150/200	HM(HD)B 270	HM(HD)B 325	HMHDB 400	HMB 500
0	0	0	0	0	0	0	•	•	•	•	•	0


Please contact Kawasaki to order this feature.

2-12 Special Features (cont)

The Tj speed sensor is a hall effect dual channel speed probe that can provide feedback of both speed and direction.

Signal Outputs:	Square wave plus directional signa
Power Supply:	8 to 32 V @ 40 mA
Protection class:	IP68
Output frequency:	16 pulses/revolution

Installation Details




Tk Output Module

with the optional T401 output module.

The addition of the T401 module provides a software configured single channel tachometer and relay with a 0/4-20 mA analogue current output.


The software and calibration cable is also provided.

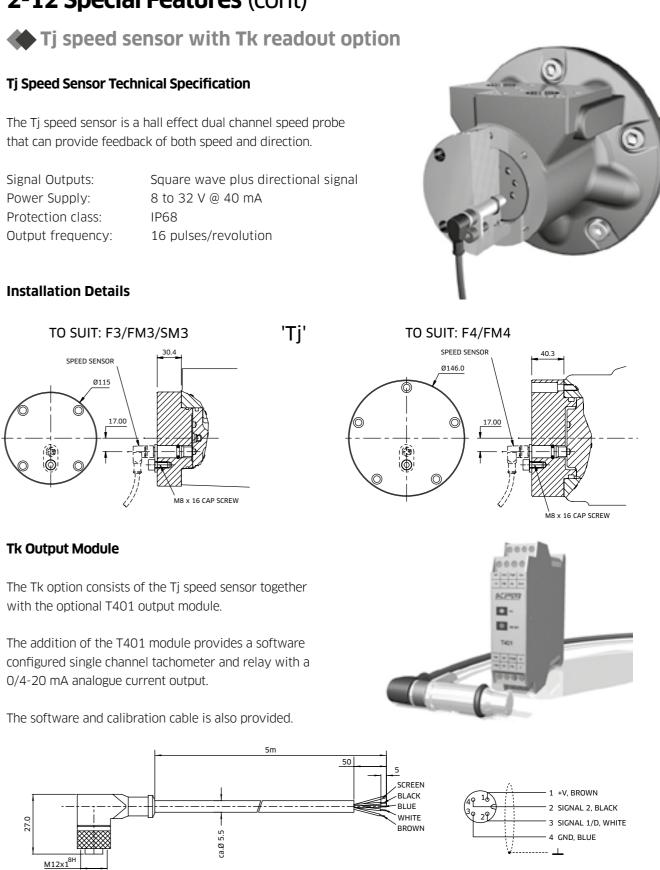

* Cannot be fitted to HMB010



3-1 HMB010



SPLINE DATA

PRESSURE ANGLE

NUMBER OF TEETH

MAJOR DIAMETER

FORM DIAMETER

MINOR DIAMETER


DIAMETER OVER PINS

PIN DIAMETER

'S'

PITCH

3-1 HMB010 (cont)

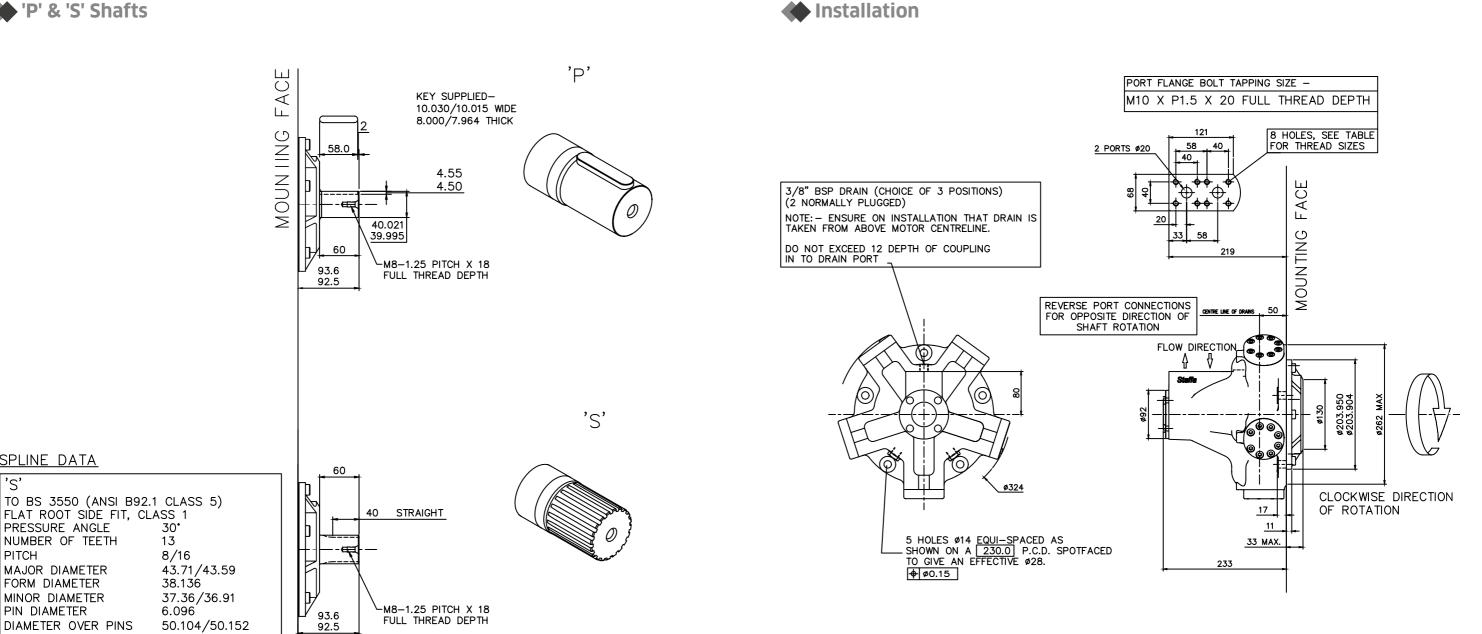

3-2 HMB030


'S'


'7'


3-3 HMB030 (cont)


◆ 2 Piece - 'P', 'S' and 'Z' Shafts

Monobloc - 'P', 'S' and 'Z' Shafts

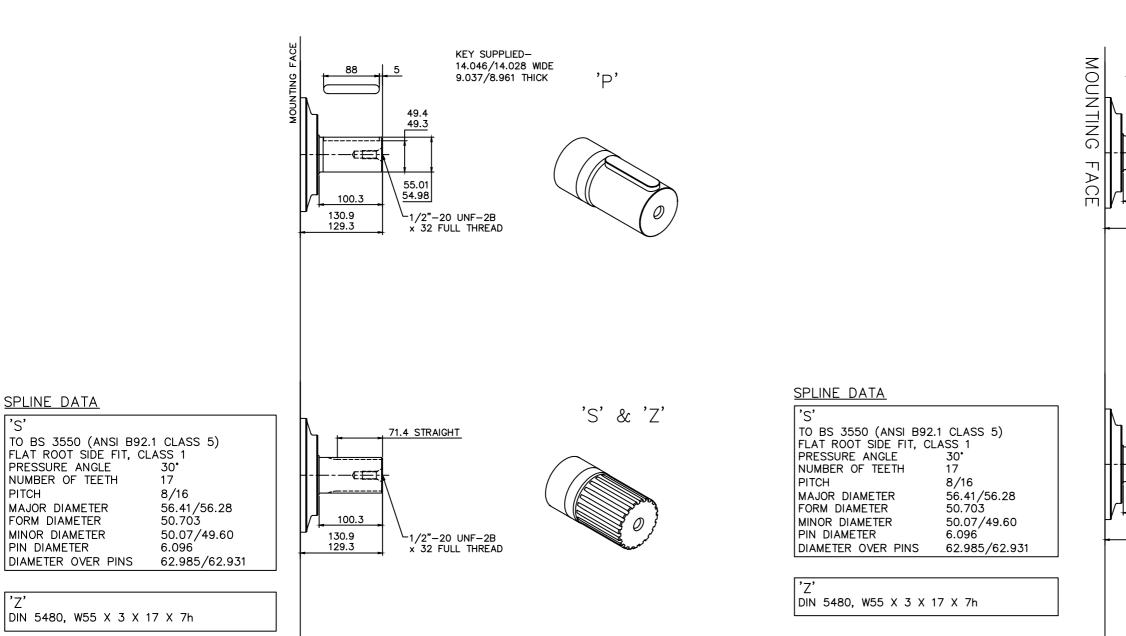

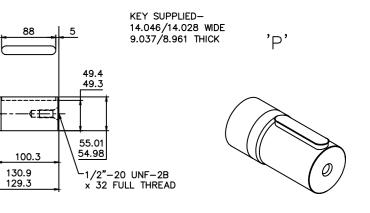




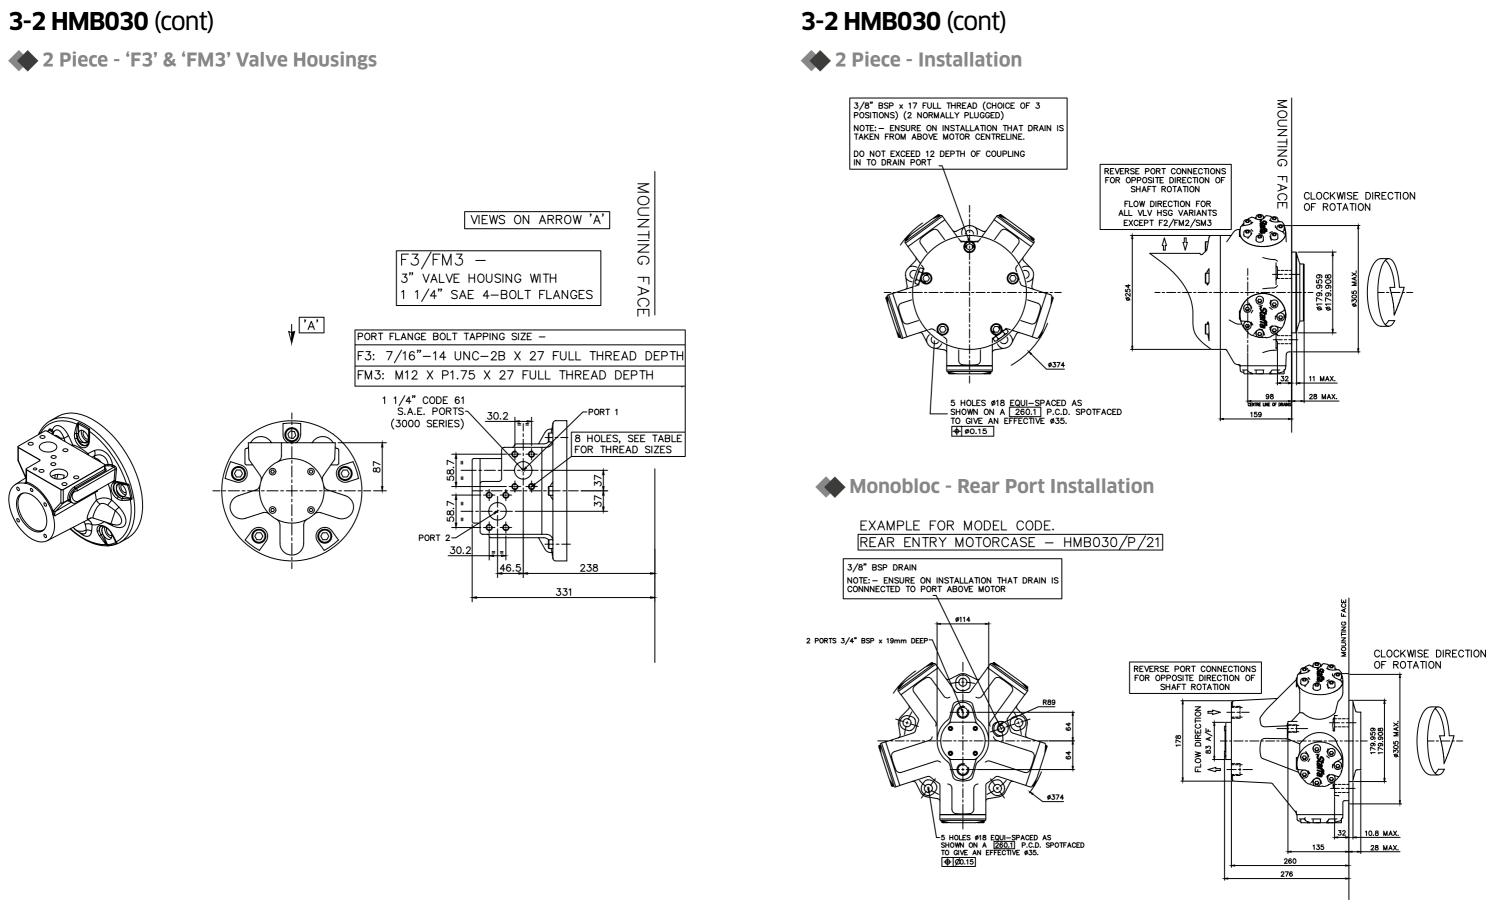


3-2 HMB030 (cont)

3-3 HMB045

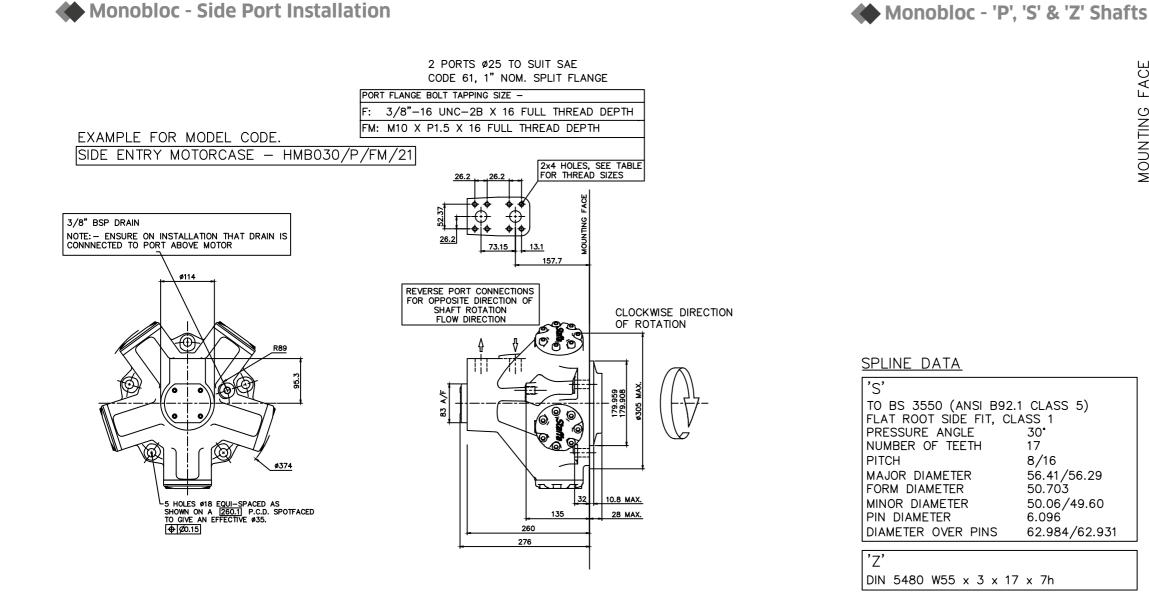


HMB MOTORS

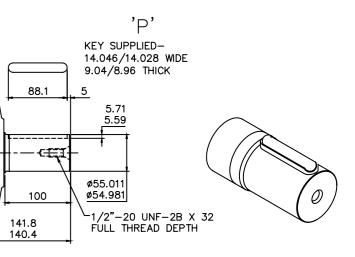

FACE

MOUNTING





3-3 HMB045 (cont)

2 Piece - 'P', 'S' & 'Z' Shafts

3-3 HMB045 (cont)


2 Piece -'SM3' Valve Housing

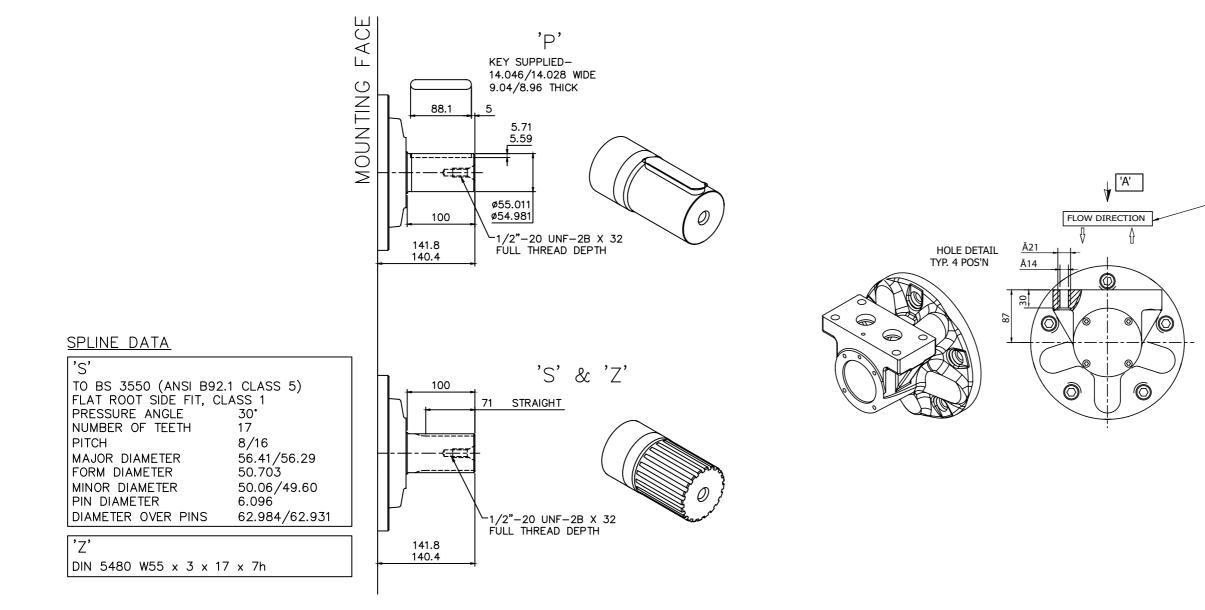

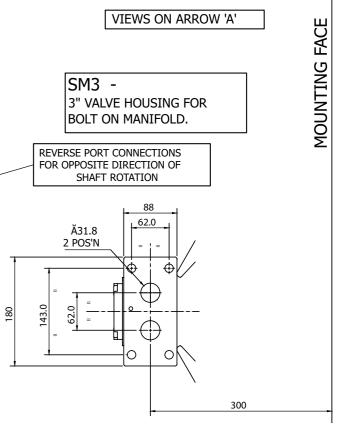


3-3 HMB045 (cont)



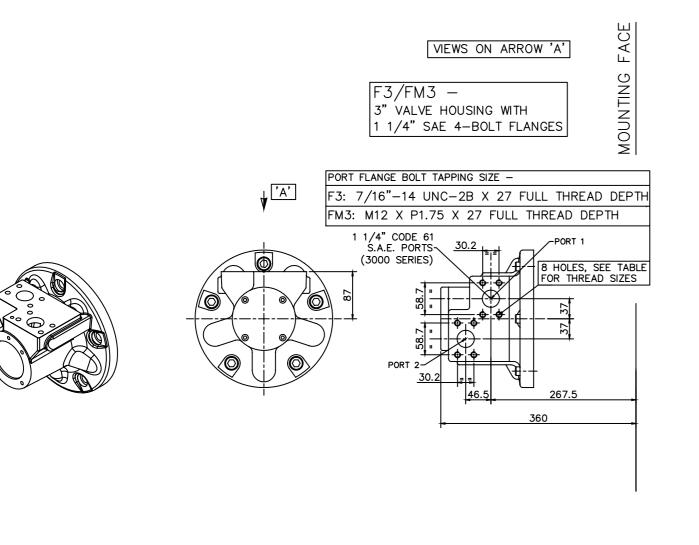

3-3 HMB045 (cont)


2 Piece - Installation

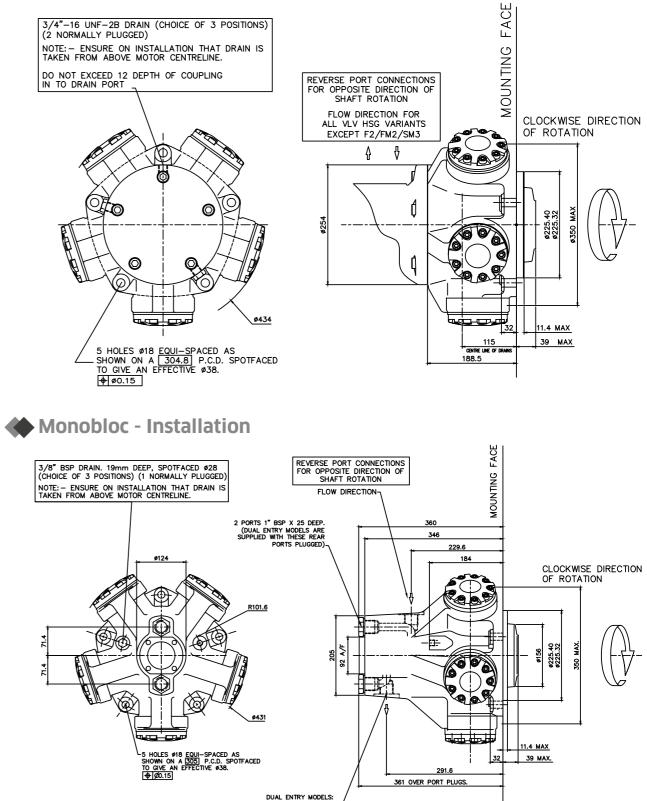

DUAL ENTRY MODELS: 2 SIDE PORTS 1" BSP x 25 DEEP. SPOTFACED TO \$63.


3-4 HMB060/080

\(\begin{bmatrix} 'P', 'S' & 'Z' Shafts)

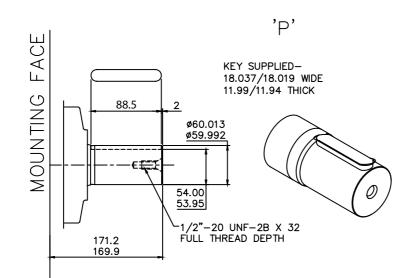




'T' Shaft



SPLINE DATA 'S' TO BS 3550 (ANSI B92.1 CLASS 5) FLAT ROOT SIDE FIT, CLASS 1 PRESSURE ANGLE 30* NUMBER OF TEETH 14 PITCH 6/12 , 62.553/62.425 55.052 MAJOR DIAMETER FORM DIAMETER MINOR DIAMETER 54.084/53.525 PIN DIAMETER 8.128 DIAMETER OVER PINS 71.593/71.544 'Z'

DIN 5480 W70 x 3 x 30 x 22 x 7h

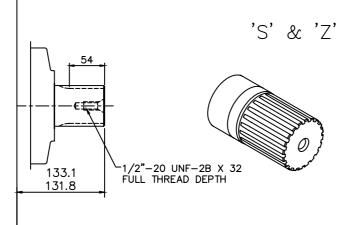

52

HMB MOTORS

'⊤' KEY SUPPLIED-19.10/19.05 SQ. -1 1/2"-12 UNF THREAD

ø61.252 (DATUM) BASIC TAPER, ON DIA 0.1001/0.0999 : 1


SLOTTED NUT 45.2 THICK 57.15 A/F


3-4 HMB060/080 (cont)

'SM3' Valve Housing


3-4 HMB060/080 (cont)


'F3' & 'FM3' Valve Housings

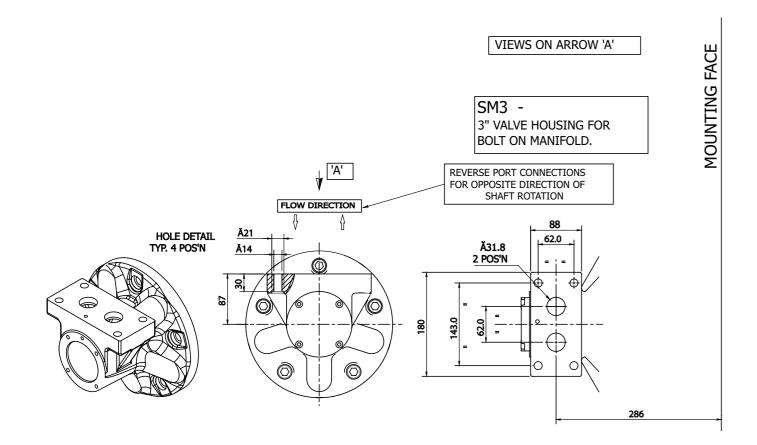




O

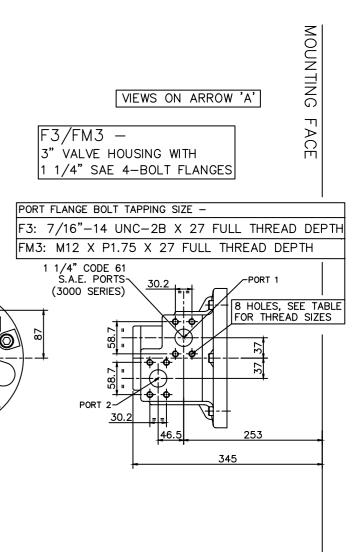


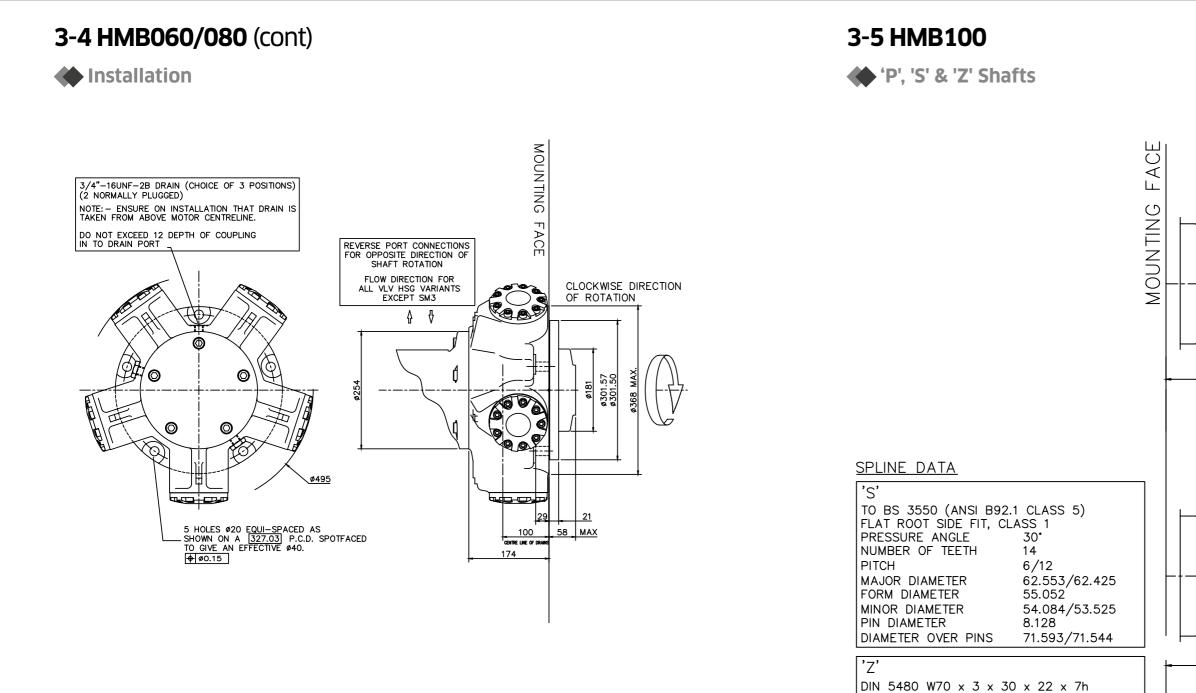

HMB MOTORS




'P'




3-5 HMB100 (cont)


(T' Shaft

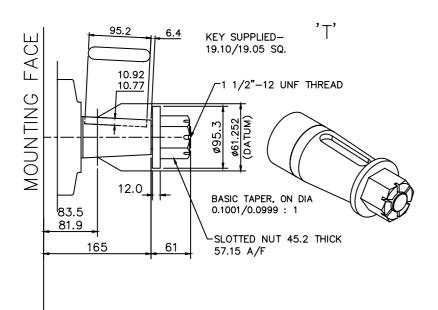

3-5 HMB100 (cont)

'SM3' Valve Housing

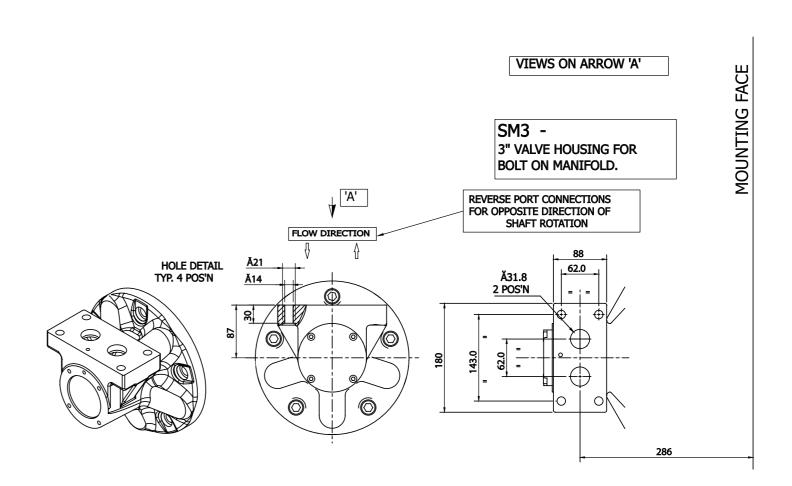

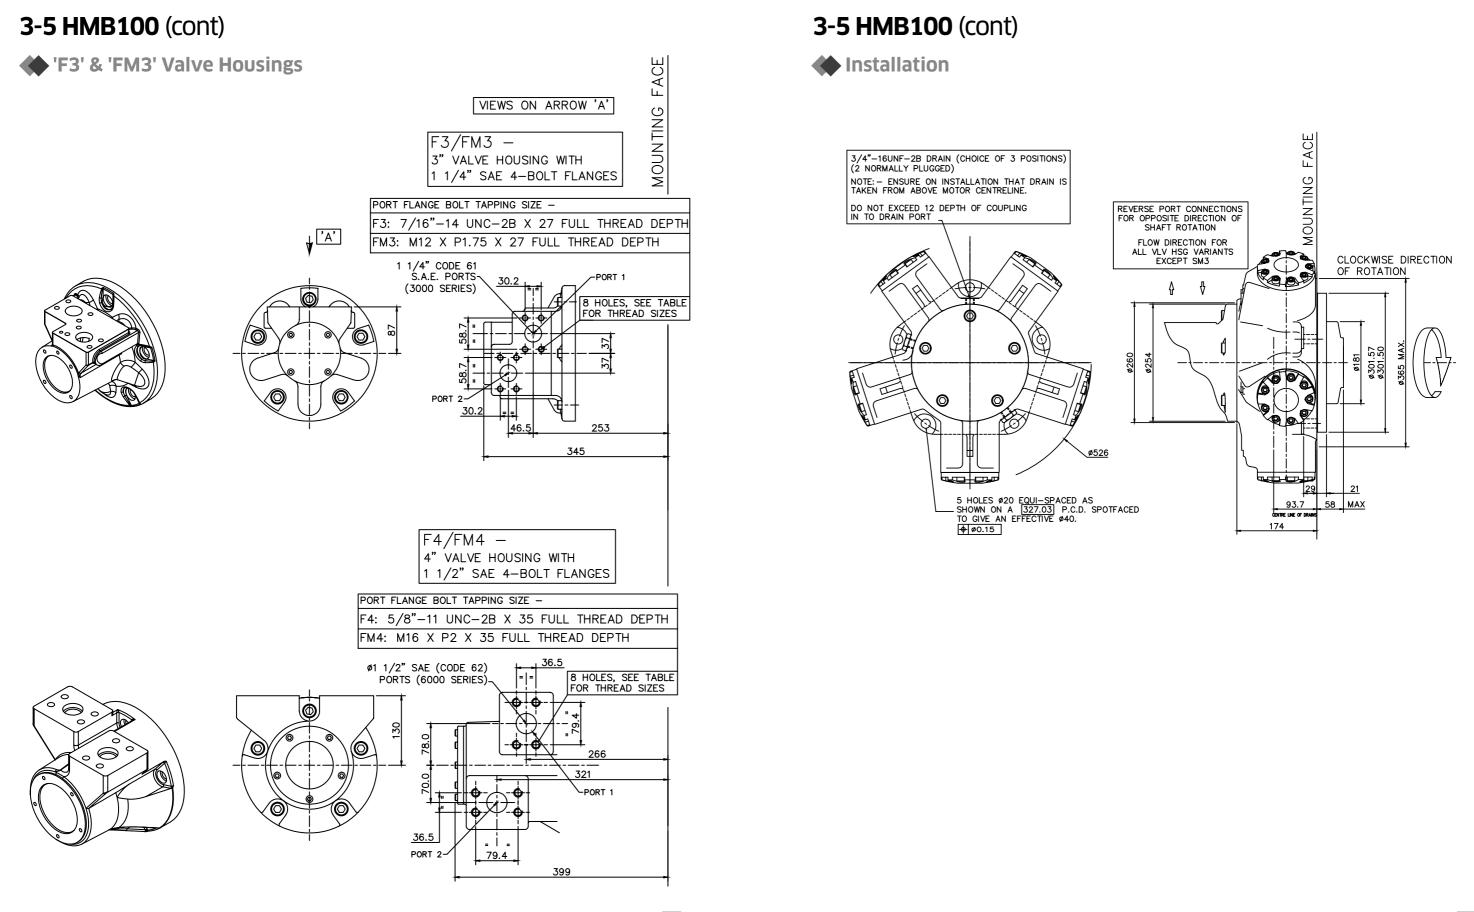


3-6 HM(HD)B125

3-6 HM(HD)B125 (cont)

HMB125 - 'P1', 'S3' & 'Z3' Shafts

HMB125 - **'T'** Shaft

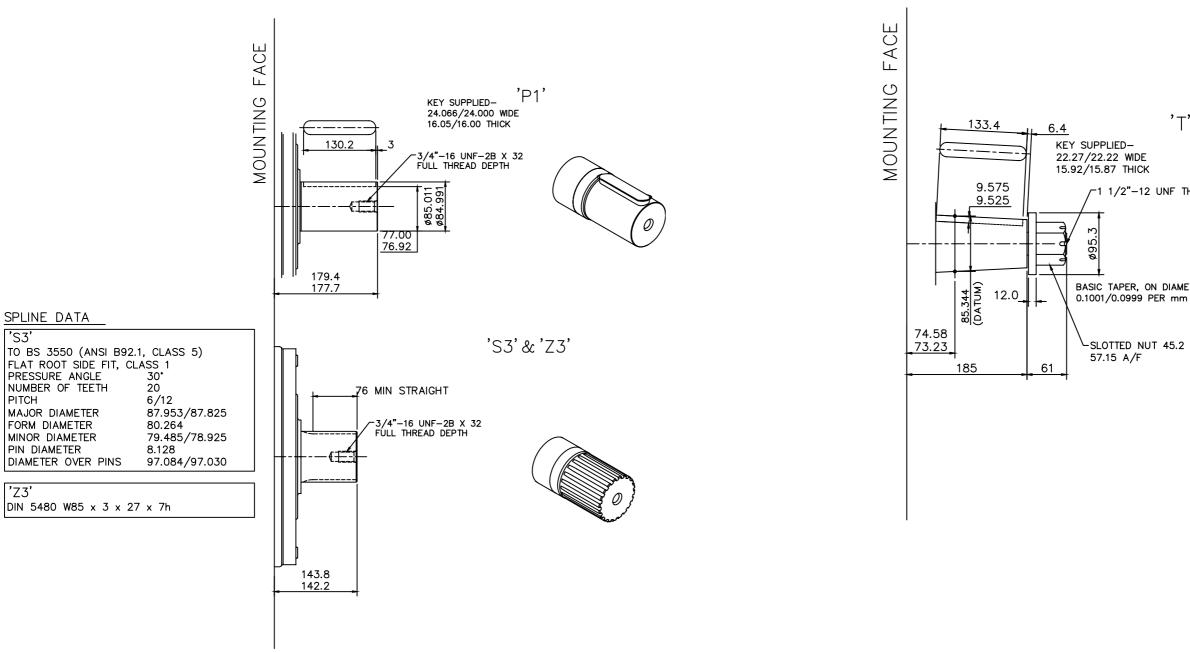

HMB MOTORS

'⊤' -1 1/2"-12 UNF THREAD BASIC TAPER, ON DIAMETER

SLOTTED NUT 45.2 THICK


3-6 HM(HD)B125 (cont)

HMHDB125 - 'P2' Shafts

3-6 HM(HD)B125 (cont)


HMHDB125 - 'S5' & 'Z5' Shafts


TING FACE

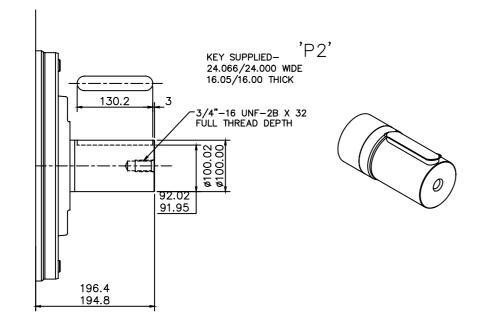

SPLINE DATA		
		ı Ž
'S5'		
PRESSURE ANGLE	20 °	
NUMBER OF TEETH	23	
PITCH	6/12	
MAJOR DIAMETER	100.652/100.526	
FORM DIAMETER	92.939	
MINOR DIAMETER	92.184/91.626	
PIN DIAMETER	8.128	
DIAMETER OVER PINS	109.573/109.517	
'Z5'		1
DIN 5480 W100 x 4 x 2	24 x 7h	









3-6 HM(HD)B125 (cont)

'SM3' Valve Housing

3-6 HM(HD)B125 (cont)


F3' & 'FM3' Valve Housings

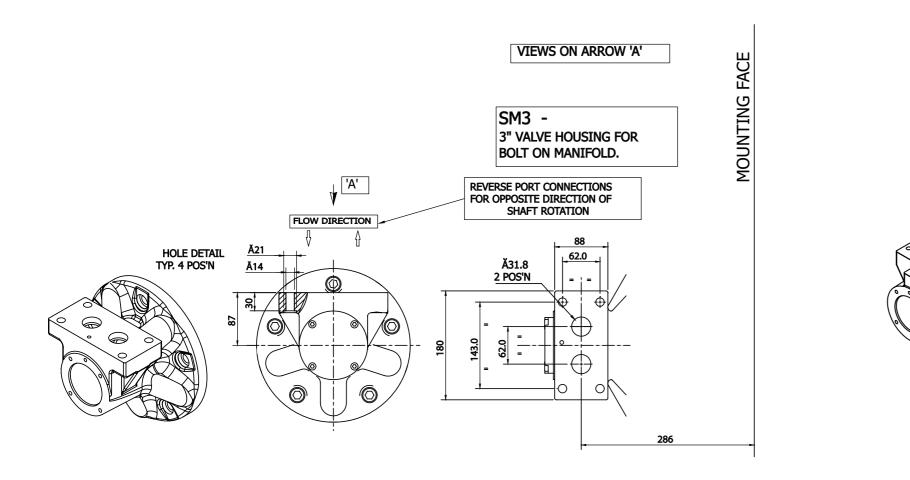

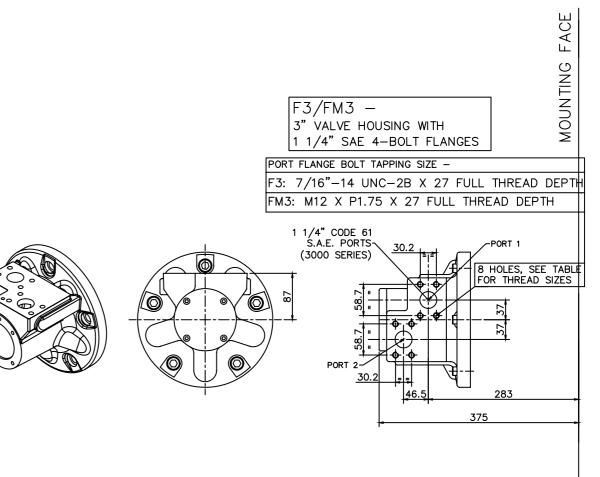


3-6 HM(HD)B125 (cont)



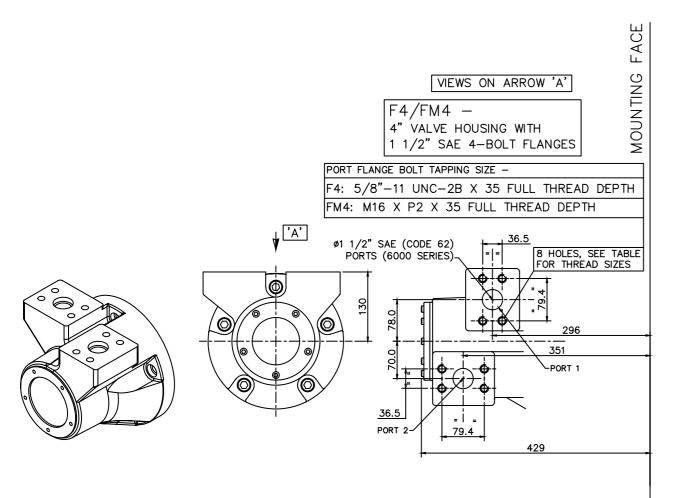

3-6 HM(HD)B125 (cont)

Installation

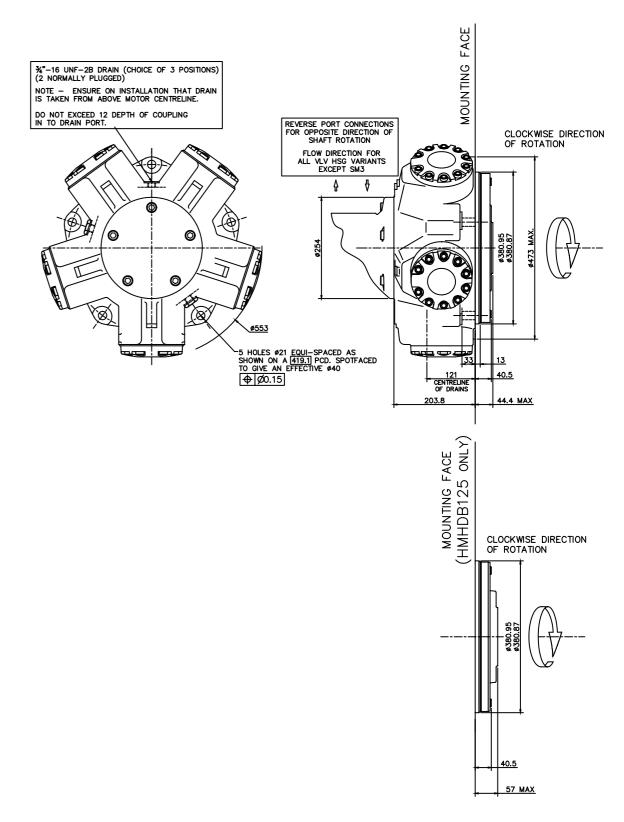



3-7 HM(HD)B150/200

HMB150/200 - 'P1', 'S3', 'S4' & 'Z3' Shafts

3-7 HM(HD)B150/200 (cont)

HMB150/200 - 'T' Shaft

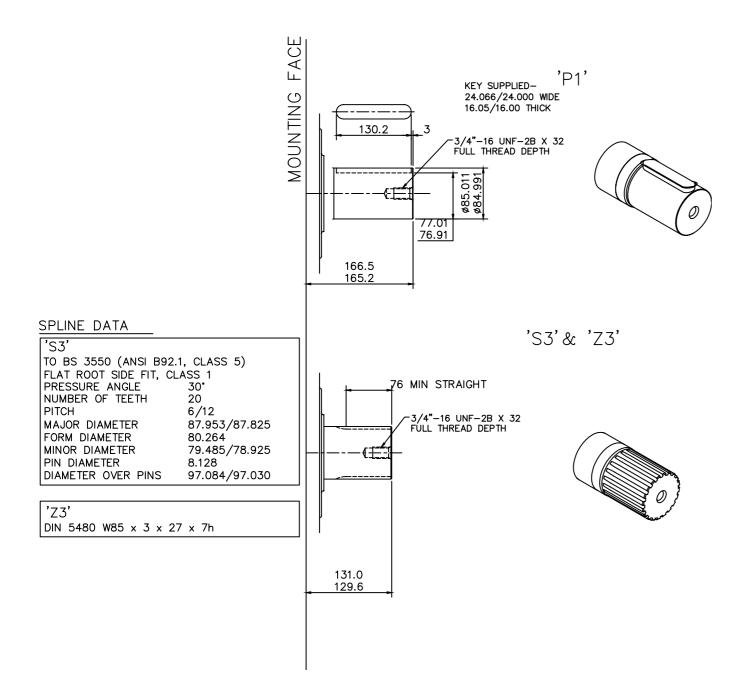



HMB MOTORS

'⊤'

-1 1/2"-12 UNF THREAD

SLOTTED NUT 45.2 THICK

3-7 HM(HD)B150/200 (cont)


'S5'


'Z5'

HMHDB150/200 - 'P2', 'S5' & 'Z5' Shafts

3-7 HM(HD)B150/200 (cont)

'SM3' Valve Housing

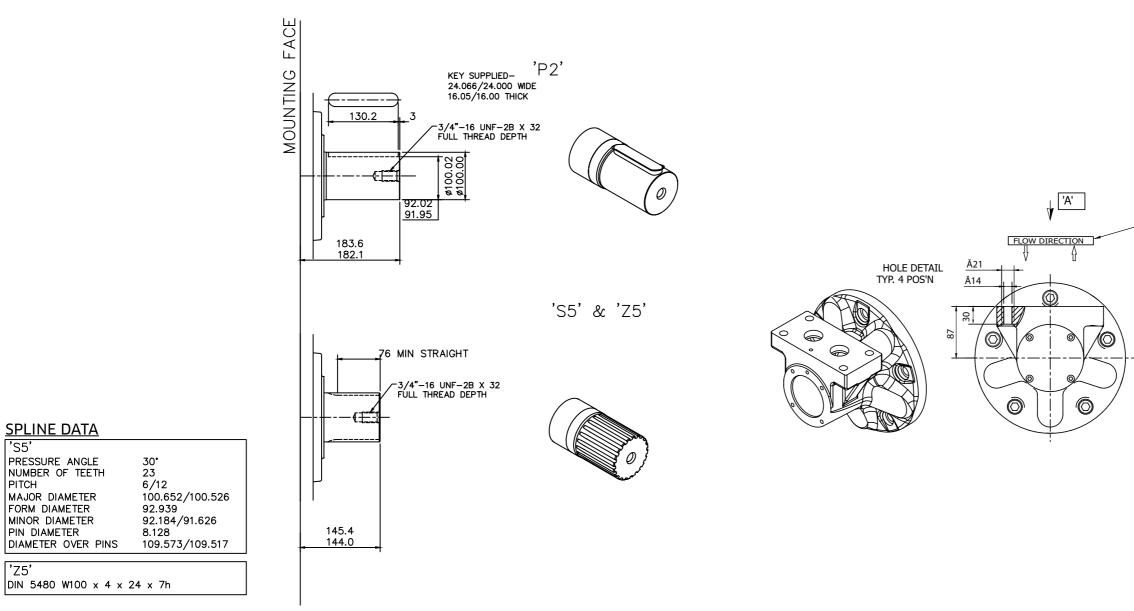

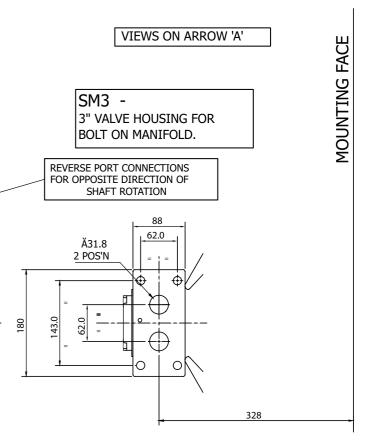



3-7 HM(HD)B150/200 (cont)

'F3' & 'FM3' Valve Housings

3-7 HM(HD)B150/200 (cont)


'F4' & 'FM4' Valve Housings

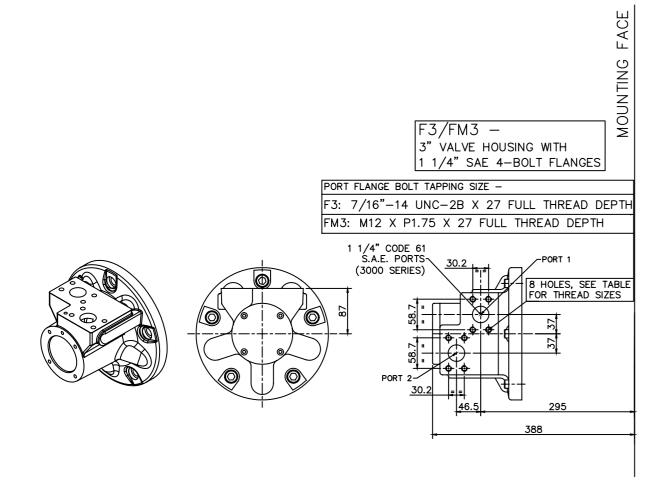

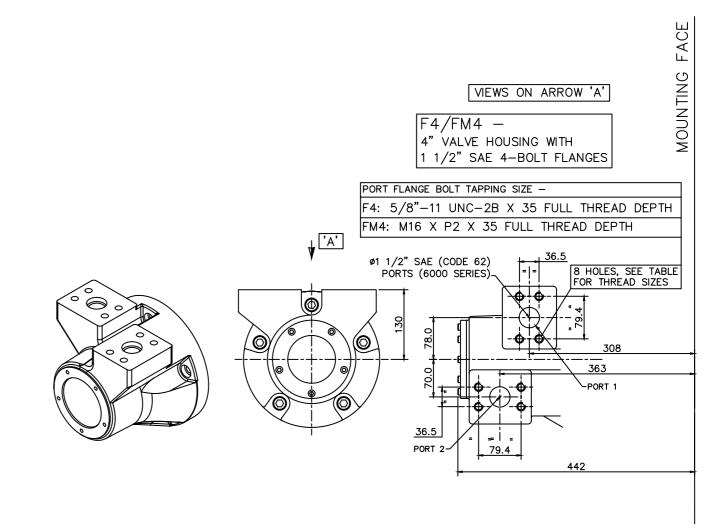

3-7 HM(HD)B150/200 (cont)

Installation

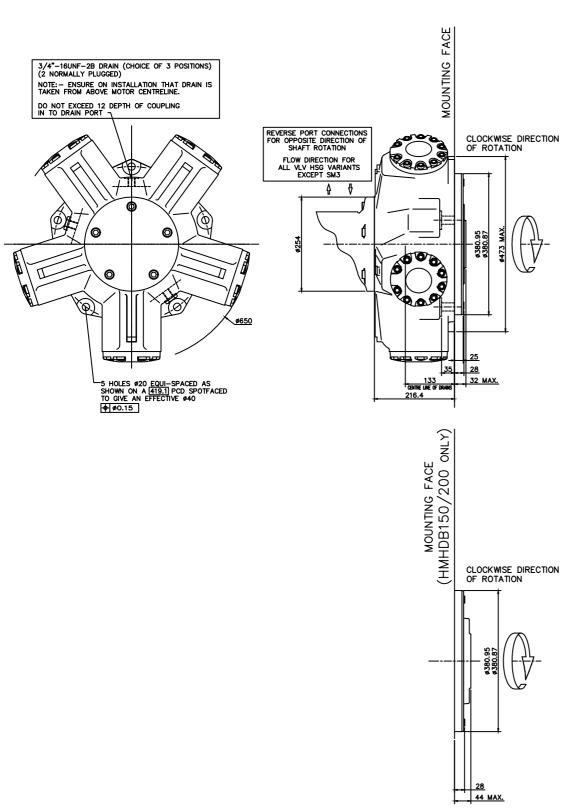



3-8 HM(HD)B270


HMB270 - 'P1', 'S3' & 'Z' Shafts

FACE

FLAT ROOT SIDE FIT, C PRESSURE ANGLE		
NUMBER OF TEETH	30 ° 20	
PITCH MAJOR DIAMETER	6/12 87.953/87.825	
FORM DIAMETER	80.264	
MINOR DIAMETER PIN DIAMETER	79.485/78.925 8.128	
DIAMETER OVER PINS	97.084/97.030	

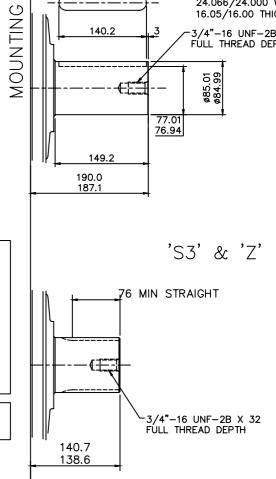

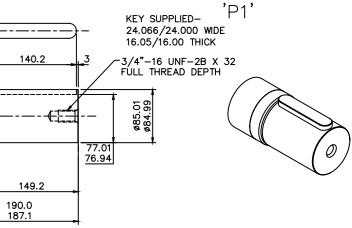




3-8 HM(HD)B270 (cont)

HMB270 - 'T' Shaft

3-8 HM(HD)B270 (cont)

HMHDB270 - 'P2' & 'S5' Shafts

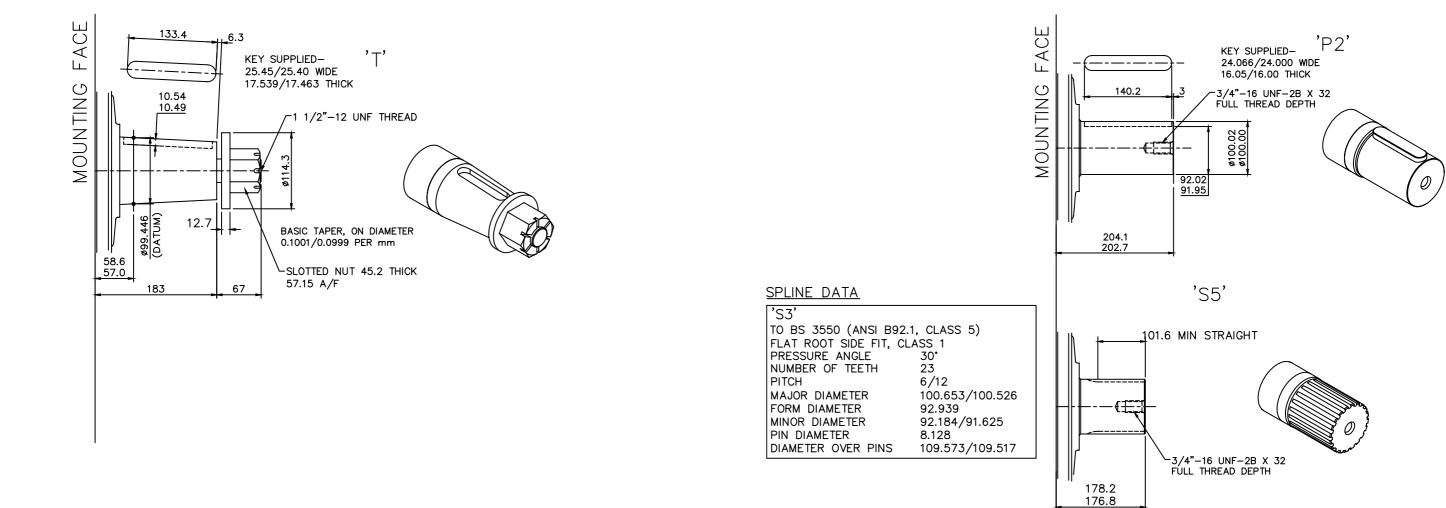



3-8 HM(HD)B270 (cont)

HMHDB270 - 'Z' Shaft

3-8 HM(HD)B270 (cont)


'F4' & 'FM4' Valve Housings

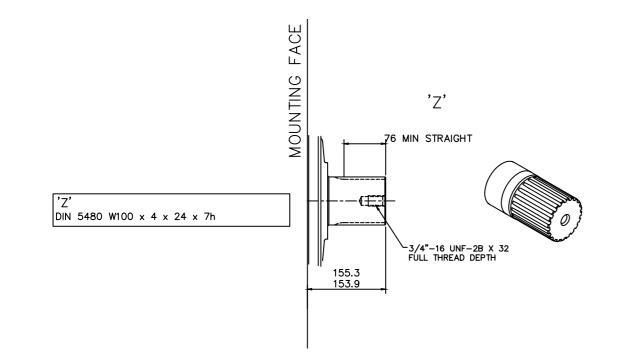

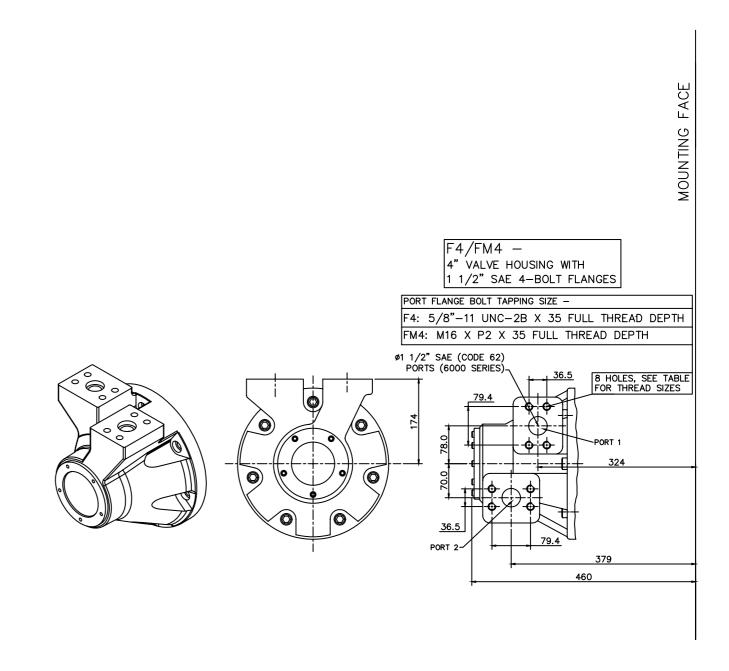

3-8 HM(HD)B270 (cont)

lnstallation

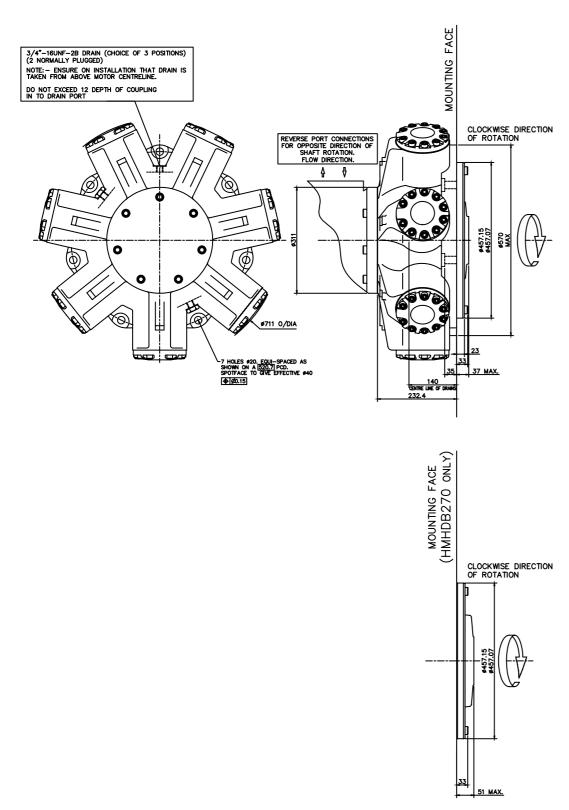

3-9 HM(HD)B325

HMB325 - 'P1', 'S3' & 'Z' Shafts

FACE


MOUNTING

<u>SPLINE DATA</u>


'S3'	
TO BS 3550 (ANSI B92.1, CLASS 5)	
FLAT ROOT SIDE FIT, CLASS 1	
PRESSURE ANGLE 30°	I IK
NUMBER OF TEETH 20	\
PITCH 6/12	\
MAJOR DIAMETER 87.953/87.825	
FORM DIAMETER 80.264	
MINOR DIAMETER 79.485/78.925	
PIN DIAMETER 8.128	
DIAMETER OVER PINS 97.084/97.030	
'Z'	/
DIN 5480 W100 x 4 x 24 x 7h	

140.7 138.6

HMB MOTORS

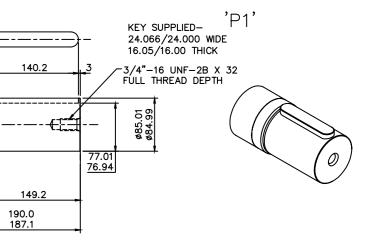


'S3' & 'Z'



3-9 HM(HD)B325 (cont)

HMB325 - 'T' Shaft

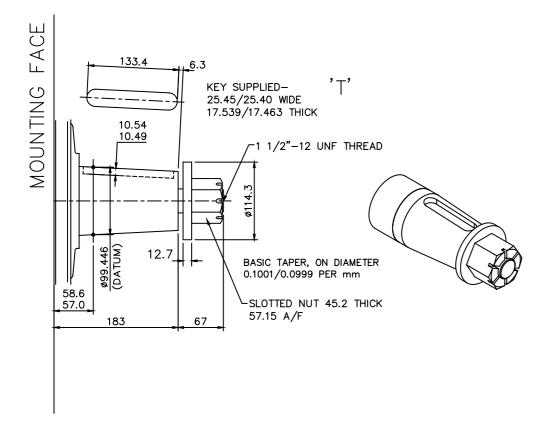

3-9 HM(HD)B325 (cont)

HMHDB325 - 'P2' & 'S5' Shafts

FACE

MOUNTING


53'	
BS 3550 (ANSI B	92.1, CLASS
AT ROOT SIDE FIT,	CLASS 1
RESSURE ANGLE	30°

SPLINE DATA


'S3'	
TO BS 3550 (ANSI B92.	1, CLASS 5)
FLAT ROOT SIDE FIT, CL	ASS 1
PRESSURE ANGLE	30°
NUMBER OF TEETH	23
PITCH	6/12
MAJOR DIAMETER	100.653/100.526
FORM DIAMETER	92.939
MINOR DIAMETER	92.184/91.625
PIN DIAMETER	8.128
DIAMETER OVER PINS	109.573/109.517


178.2 176.8

HMB MOTORS

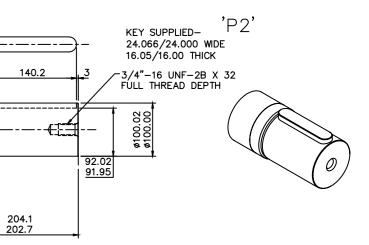


'S5'




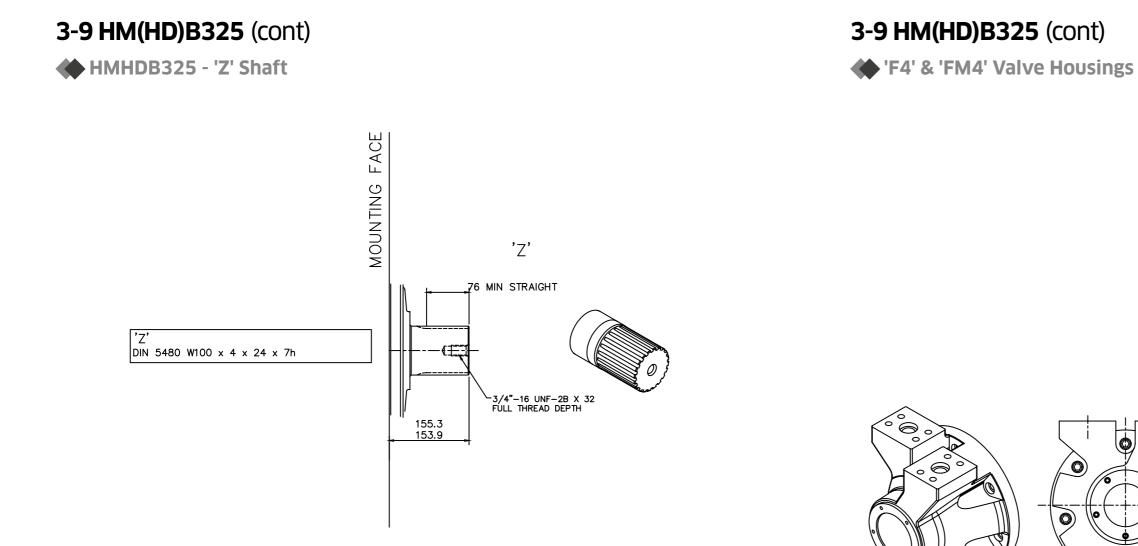

HMB MOTORS

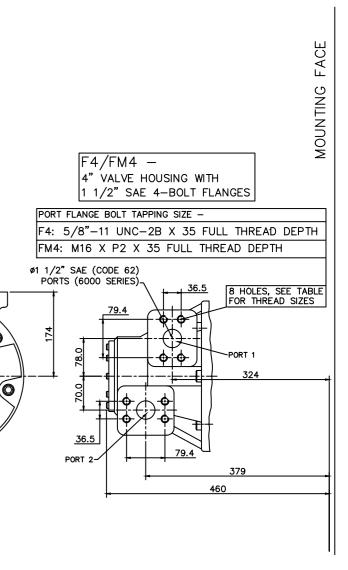

lØ,

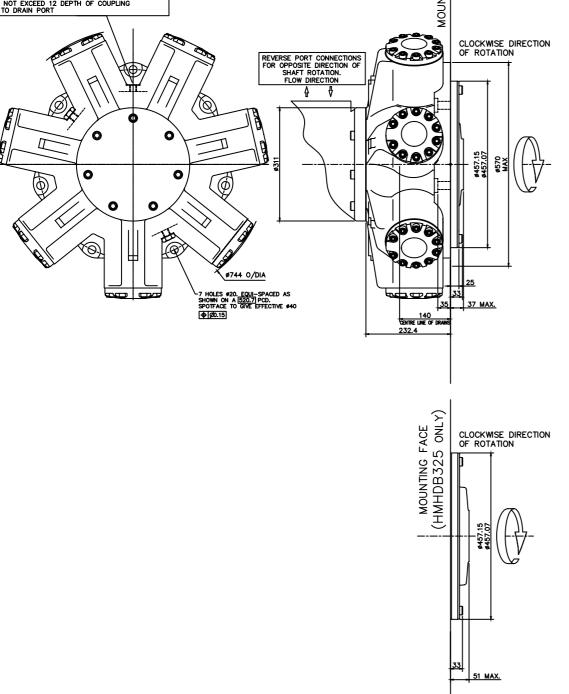


SPLINE DATA

'S'		1		
TO BS 3550 (ANSI B92.1	, CLASS 5)			
FLAT ROOT SIDE FIT, CLA				۱L
PRESSURE ANGLE	30 °			I ∥
NUMBER OF TEETH	23			
PITCH	6/12			
MAJOR DIAMETER	100.653/100.526			ΠI
FORM DIAMETER	92.939			
MINOR DIAMETER	92.184/91.625			ľŀ
PIN DIAMETER	8.128			
DIAMETER OVER PINS	109.573/109.517			
		:		μ
'Z'				
DIN 5480 W100 x 4 x 24	4 x 7h			L
		ᅬᄂ	<u></u> †-†	


FACE

MOUNTING

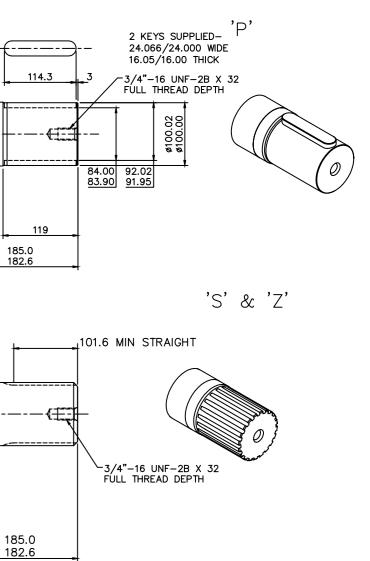



Installation

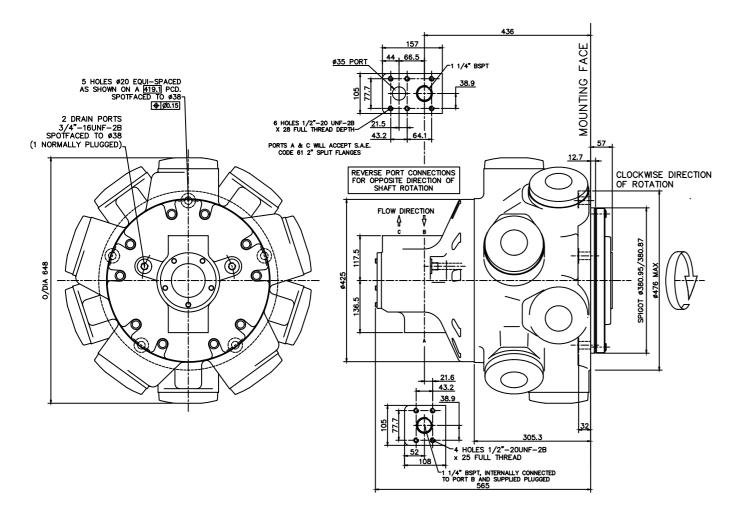


3-11 HMB500

'P', 'S' & 'Z' Shafts


FACE

MOUNTING

<u>SPLINE DATA</u>		
'S'		ון ר
TO BS 3550 (ANSI B92	.1, CLASS 5)	
FLAT ROOT SIDE FIT, C	LASS 1	
PRESSURE ANGLE	30 ·	
NUMBER OF TEETH	23	
PITCH	6/12	
MAJOR DIAMETER	100.653/100.526	
FORM DIAMETER	92.939	
MINOR DIAMETER	92.184/91.625	
PIN DIAMETER	8.128	
DIAMETER OVER PINS	109.573/109.517	
[1-1		- I I
'Z'		
DIN 5480 W100 x 4 x	24 x 7h	」│⋕

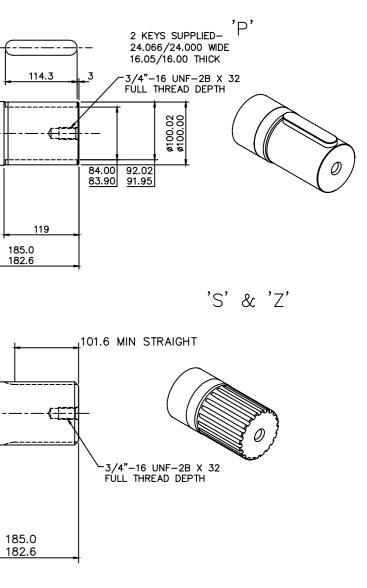



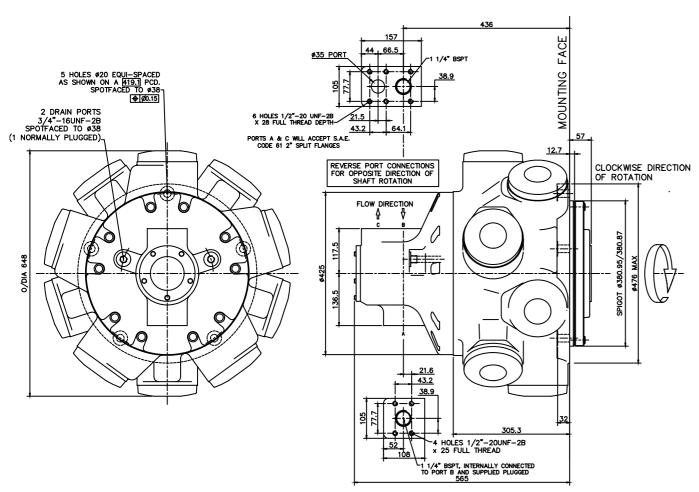

NOTES

Conversion Table

Pressure		
bar	PSI	
1	14.5	
Flow		
l/min	gal/min	
1	0.264 US	
1	0.219 UK	
Length		
mm	inch	
25.4	1	
Torque		
Nm	lbf ft	
1	1.737	
Power		
kW	hp	
1	1.341	
Mass		
kg	lb	
1	2.2	

NOTES

NOTES

KAWASAKI PRECISION MACHINERY (UK) LTD

Ernesettle, Plymouth Devon, PL5 2SA, England

Tel: +44 1752 364394 Fax: +44 1752 364816 Mail: info@kpm-uk.co.uk Website: www.kpm-eu.com

OTHER GLOBAL SALES OFFICES

JAPAN

Kawasaki Heavy Industry Ltd, Precision Machinery Ltd. Tokyo Office World Trade Center Bidg. 4-1 Hamamatsu-cho 2-chome, Minato-ku Tokyo 105-6116 Japan Tel: +81-3-3435-6862 Website: www.khi.co.jp/kpm

U.S.A

Kawasaki Precision Machinery (U.S.A.), Inc. 3838 Broadmoor Avenue S.E. Grand Rapids Michigan 49512 U.S.A. Tel: +1-616-975-3101 Website: www.kpm-usa.com

CHINA

Kawasaki Precision Machinery Trading (Shanghai) Co., Ltd. 17th Floor (Room 1701), The Headquarters Building No168 XiZang Road (M) Huangpu District Shanghai 200001 China Tel: +86-021-3366-3800

KOREA

Flutek, Ltd. 192-11, Shinchon-dong Changwon Kyungnam 641-370 Korea Tel: +82-55-286-5551 Website: www.flutek.co.kr

The specified data is for product description purposes only and may not be deemed to be guaranteed unless expressly confirmed in the contract.

Data sheet: M-2005/08.18